

RoHS Compliant

REV	ECN No.	DATE	REMARK
A	原始图档	2022.04.09	

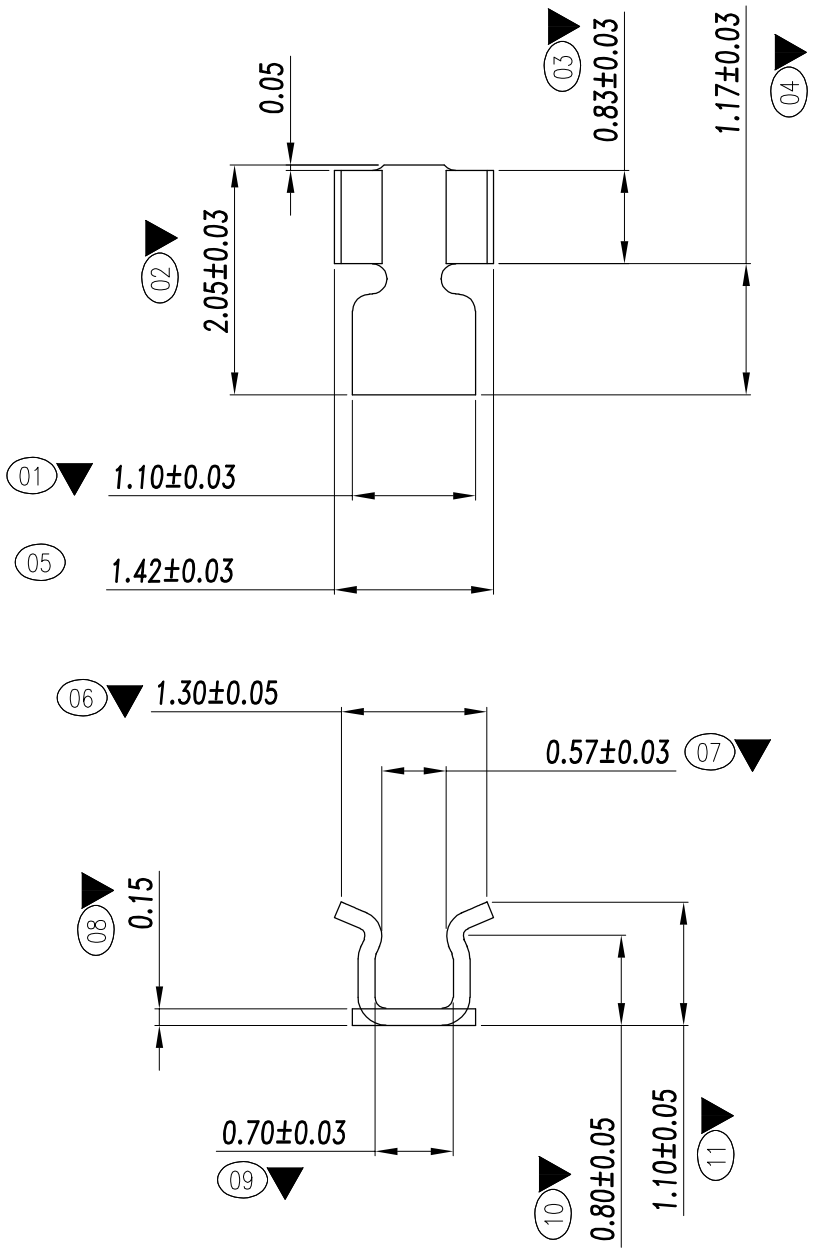

NOTES:
1.MATERIAL:
1-1.STAINLESS STEEL,T=0.15mm.
2.SPECIFICATIONS:
3.DURABILITY:100 CYCLES.
3-1.CONTACT RESISTANCE:50MR MAX.
3-2.OPERATING TEMPERATURE:-20℃~+65℃.
3-3.PRE-LDAD FORCE:0.45N ON CONTACT POINT.
3-4.FORCE MAX,DEFLECTION:0.70N ON CONTACT POINT
3-5.MAX.BEAM DEFLECTION:1.00MM. ON CONTACT POINT.
4.PACKING SPECIFICATION:REEL&TAPE

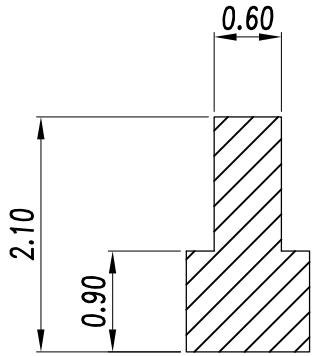

RECOMMENDED PCB LAYOUT

MATERIAL NO.:
JK-0R1120AG0171R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL ▶ = 11 ▽ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

X. ±0.25	X. ±4.0°
.X ±0.20	.X ±3.0°
.XX ±0.15	.XX ±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE: (PART DRAWING) SHIELDCTO.15)
CAN CLIPL2.05*W1.3*H1.1

ECN DESCRIPTION: RELEASE TO TOOLING

DRAWN BY: KATE DENG DATE:

CHECKED BY: FAND DATE: -----

APPROVED BY: Wang Yan DATE: ------

JKF connectivity J K F Technology Co.,Ltd

DOCUMENT NO.

SHEET NO.: 1 OF 1

DIMENSION STYLE: MM ONLY

DESIGN UNITS: METRIC

SCALE: 10:1

THIRD ANGLE PROJECTION

frame size: A4
Rev.A 2022.04.09