


RoHS Compliant


REV	ECN No.	DATE	REMARK
A	原始图档	2022.04.09	

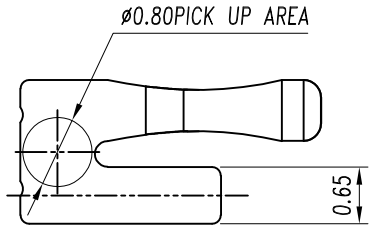


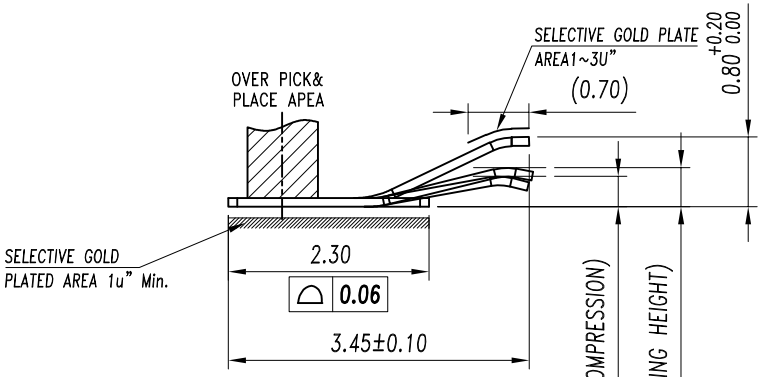


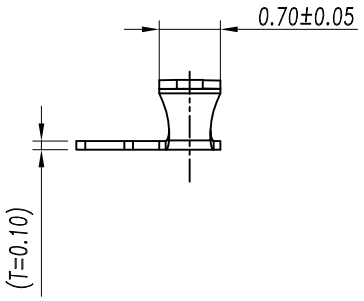

NOTES
(1)MATERIAL:SUS-301 THICKNE=0.10mm
(2)PRODUCT SPECIFICATIONS:
2-1:RATED CURRENT: 1.0A
2-2:VOLTAGE RATING: 1.50V
2-3:CONTACT RESISTANCE: 80mΩ/MAX
2-4:WELDING THRUST: ⩾ 3KG
2-5:OPERATING TEMPERATURE: -40°C~+85°C
(3):SALT SPRAY: 24 HOURS
(4):FINISH:50u"Min NICKEL UNDERRLATING OVER ALL.
(5):REQUIREMENTS
5-1:TERMINAL TO EAT FULL TIN,NOTPEELING
WELDING OBVIOUS COLOR AND OTHED ADVERSE
5-2:ROHS,REACH,HF HALOGER ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMNTAL REQUIREMENTS

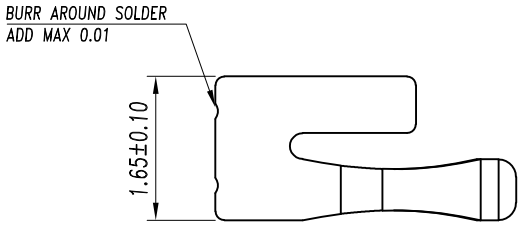




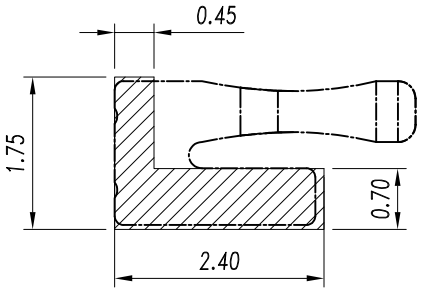

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05MM
(FOR REFERENCE ONLY)

NORMAL FORCE PROFILE:

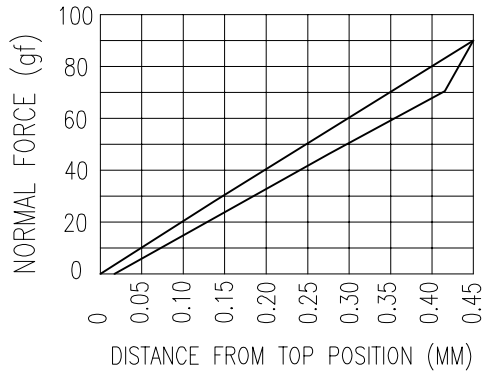

MATERIAL NO.:
JK-0R0800AG0070R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL: C = 0, ▶ = 12

GENERAL TOLERANCES (UNLESS SPECIFIED)	
X. ±0.25	X. ±4.0°
.X ±0.20	.X ±3.0°
.XX ±0.15	.XX ±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE: H0.80 L/A SPRING TERMINAL, T=0.10MM

ECN DESCRIPTION: RELEASE TO TOOLING

DRAWN BY: KATE DENG DATE:

CHECKED BY: FAND DATE: -----

APPROVED BY: Wang Yan DATE: ------

JKF connectivity J K F Technology Co.,Ltd

DOCUMENT NO.

SHEET NO.: 1 OF 1

DIMENSION STYLE: MM ONLY

DESIGN UNITS: METRIC

SCALE: 10:1

THIRD ANGLE PROJECTION

frame size: A4
Rev.A 2022.04.09