
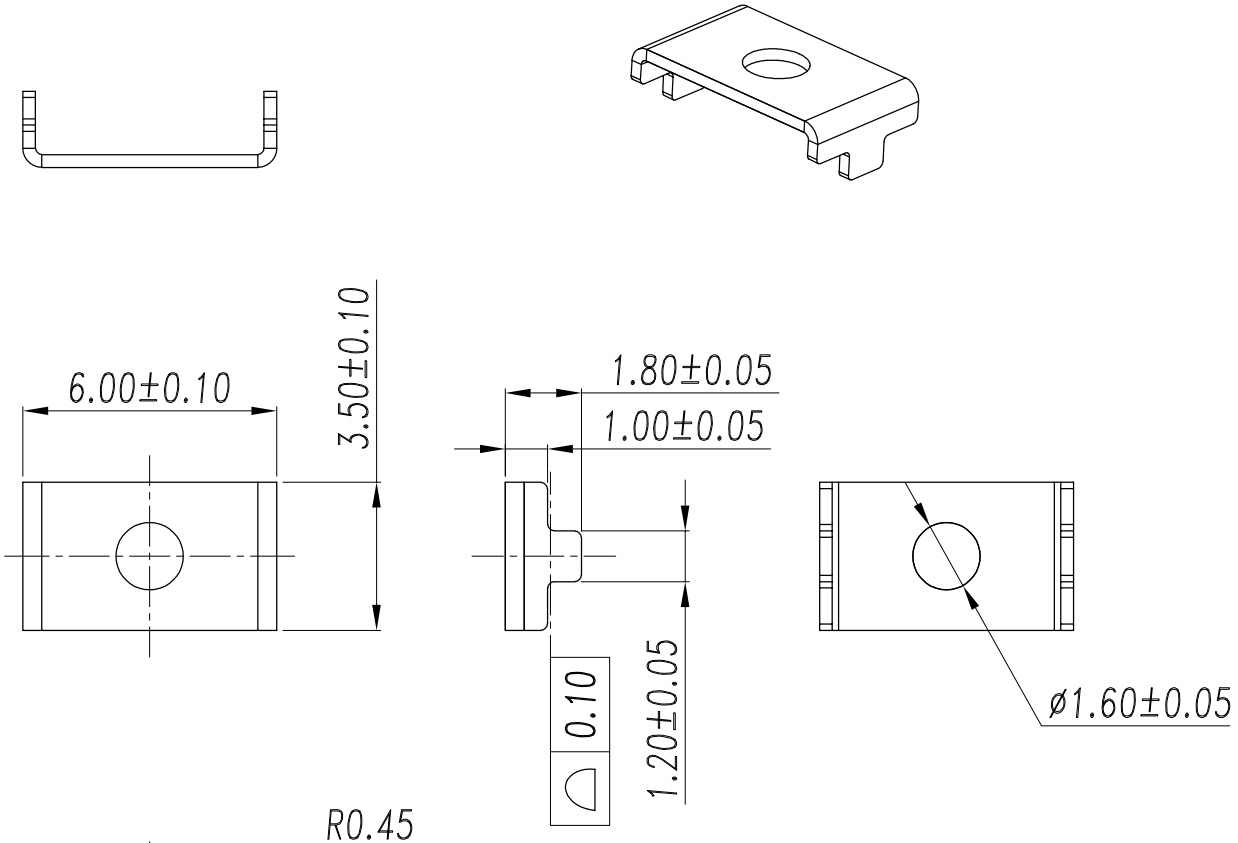


NOTES:

1. 材料: C7701(洋白铜) ,T=0.30
2. 所有外表面无污垢、毛刺及其他缺陷。
3. 毛边0.02mm MAX.,未标注圆角尺寸视为R0.15。
4. 盘装产品收料时勿绕装过紧,以免零部件变形。
5. 未标注尺寸公差为依自由公差为准。
6. 预断处来回 45° 可轻易折断。
7. 料带上、下拱翘度以0.50mm/300mm做管控。
8. 包装方式：袋装，每袋10KPCS.
9. 包装纸带宽度=6.0+(5~10)mm.

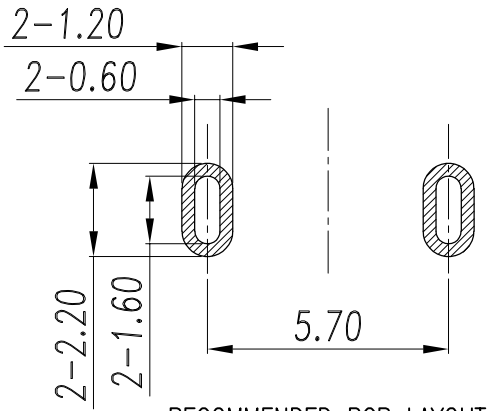

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)


GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
	X. ±0.25	FINISHED		SEE NOTES	
	.X ±0.20	APPROCED		KATE DENG	
	.XX ±0.15	CHECKED		KATE DENG	
	.XXX ±0.10	DESIGN		FAND	
ANGLE	X. ±3.0°	DRAWN		Wang Yan	
	.X ±2.0°				
	.XX ±1.0°				


杰康富精密电子有限公司
JKF Precision Electronics Co., Ltd.

TITLE:	6.0*3.5*1.8 SCREW SUPPORT FRAME						
PART NO.	JK-DR1800AG0219R						
DRAWING NO.							
SCALE	1:1	SIZE	A4	SHEET	1 OF 2	REV.	A


REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A4
Rev.A

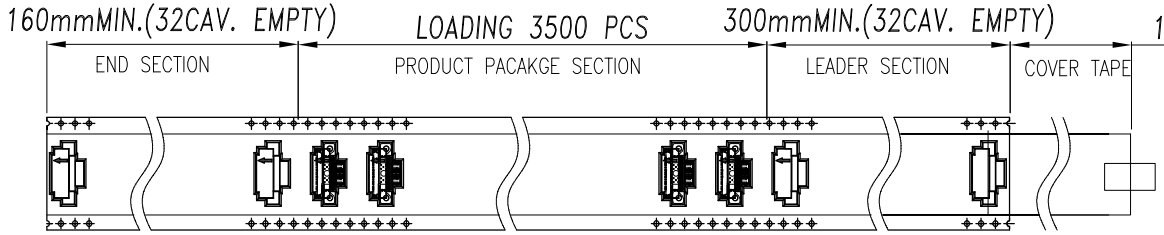


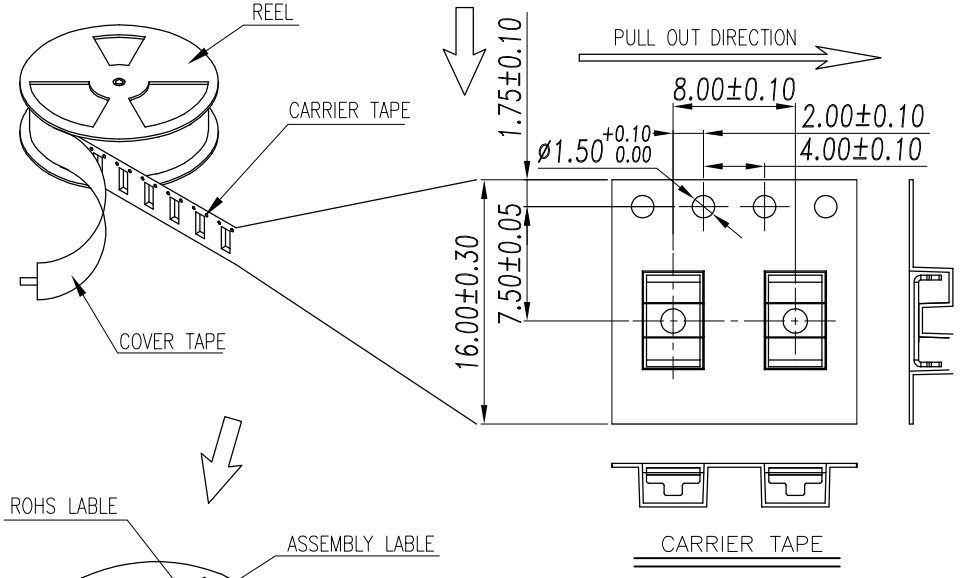


CARRIER TAPE



COVER TAPE

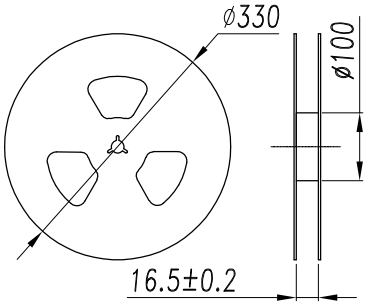

PLASTIC REEL

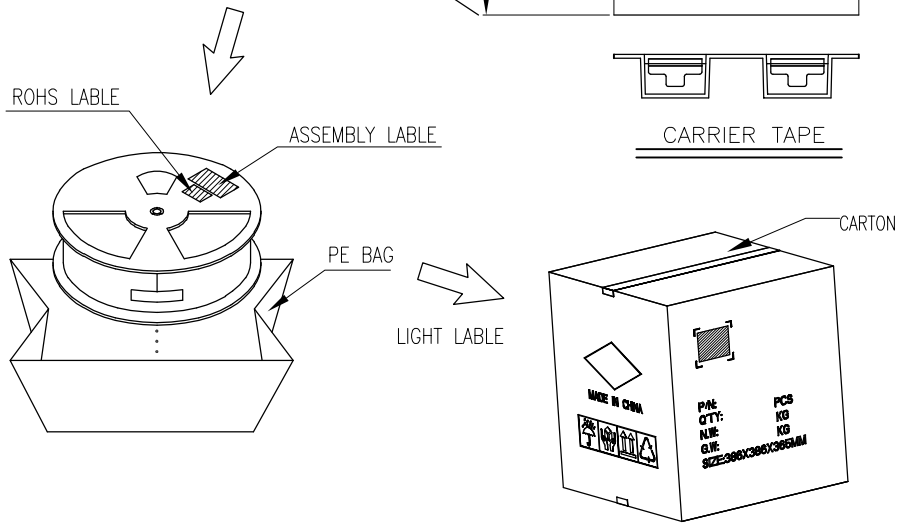

NOTES 2:

1. MATERIAL:
   - 1.1 REEL AND AXLE: PS,BLUE
   - 1.2 CARRIER TAPE: PET, LUCID
   - 1.3 COVER TAPE: PS,TRANSPARENT
   - 1.4 SHIPPING CARTON: CORRUGATED FIBER
2. DIMENSION:
   - 2.1 REEL: W=16.5, øA=330
   - 2.2 CARRIER TAPE: T=0.25 W=16.0
   - 2.3 COVER TAPE: T=0.05 W=13.30
   - 2.4 SHIPPING CARTON: L=335mm, W=335mm, H=365mm
3. QUANTITY :
   - 3.1 PRIMAY PACKING: 3500 PCS/REEL
   - 3.2 SECONARY PACKING: 15 REELS/CARTON(52500 PCS/CARTON)
4. PEELING RESISTANCE: 0.1~1.3N
   - 4.1 PEELING SPEED: 300mm/minutes
   - 4.2 PEELING ANGLE: 165° ~180°

GENERAL TOLERANCES		UNIT	mm		
DISTANCE X.		MATERIAL		SEE NOTES	
X.	±0.25	FINISHED		SEE NOTES	
.X	±0.20	APPROCED		KATE DENG	
.XX	±0.15	CHECKED		KATE DENG	
.XXX	±0.10	DESIGN		FAND	
ANGLE		DRAWN		Wang Yan	
X.	±3.0°				
.X	±2.0°				
.XX	±1.0°				

JKF Connectivity 杰康富精密电子有限公司 JKF Precision Electronics Co., Ltd.

TITLE:	6.0*3.5*1.8 SCREW SUPPORT FRAME						
PART NO.	JK-□R1800AG0219R						
DRAWING NO.							
SCALE	1:1	SIZE	A4	SHEET	2 OF 2	REV.	A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A4
Rev.A