

RoHS Compliant


REV	ECN No.	DATE	REMARK
1	原始图档		

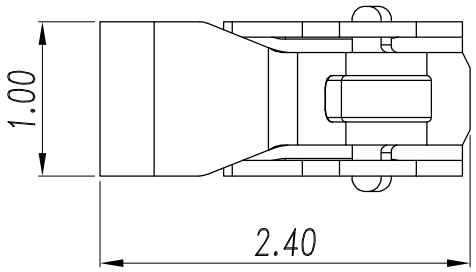


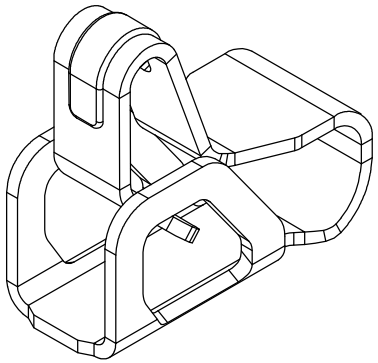


备注:

1. 材质: SUS T=0.1mm
2. 电镀: 接触区与焊接区镀金1u″
3. 额定电流: 1A
4. 额定电压: 10V DC
5. 接触电阻: 80mΩ Max
6. 机械寿命: 1500 Cycles
7. 盐雾测试: 24H

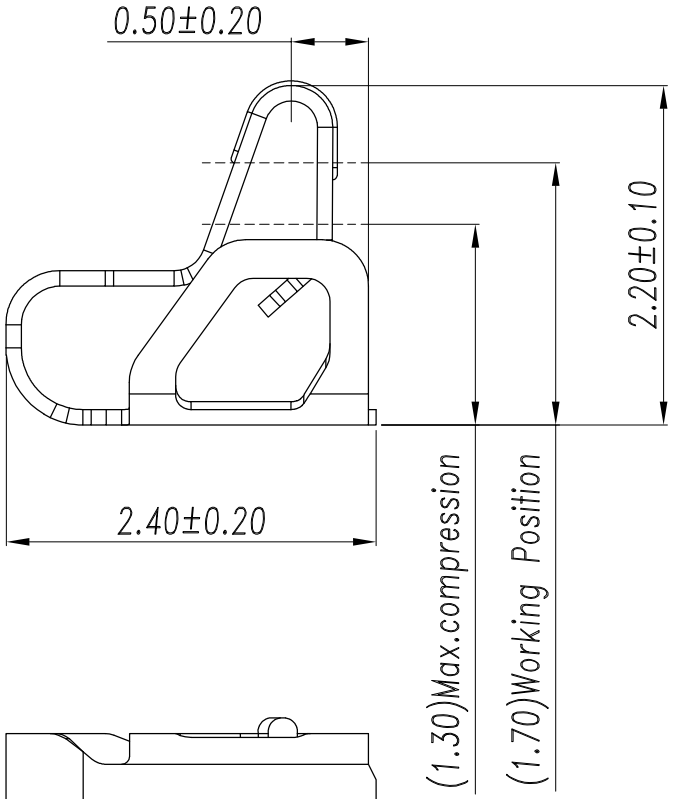


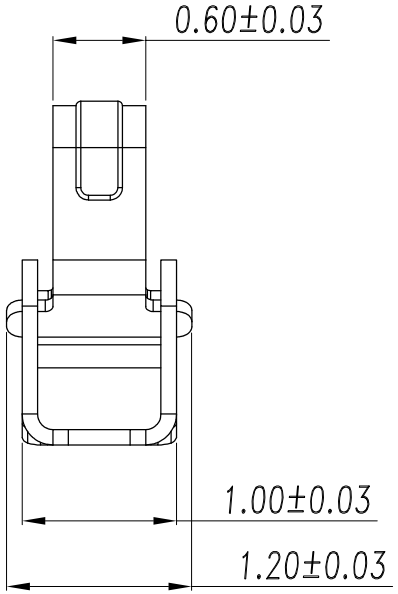

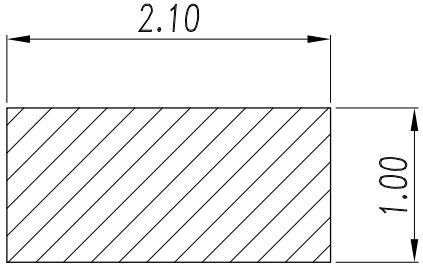

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)

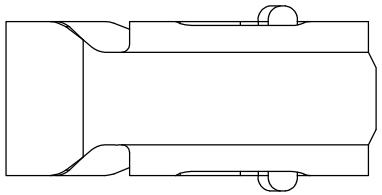

MATERIAL NO.:
JK-0R2200AG0199R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL ▽ = 0 ▶ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
X. ±0.25	X. ±4.0°
.X ±0.20	.X ±3.0°
.XX ±0.15	.XX ±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE: 弹片 2.40*1.00*2.20H

ECN DESCRIPTION: RELEASE TO TOOLING

DRAWN BY: KATE DENG — DATE:

CHECKED BY: FAND — DATE: -----

APPROVED BY: Wang Yan — DATE: ------

JKF connectivity J K F Technology Co.,Ltd

DOCUMENT NO.

SHEET NO.: 1 OF 1

DIMENSION STYLE	DESIGN UNITS	SCALE
MM ONLY	METRIC	---

THIRD ANGLE PROJECTION

frame size: A4
Rev.A