



RoHS Compliant

REV	ECN No.	DATE	REMARK
1	原始图档		

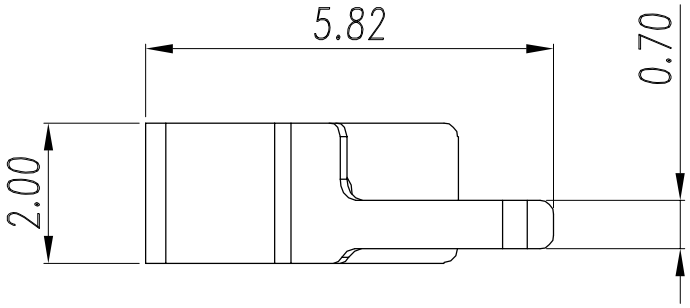

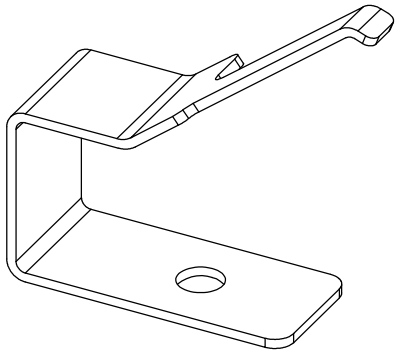

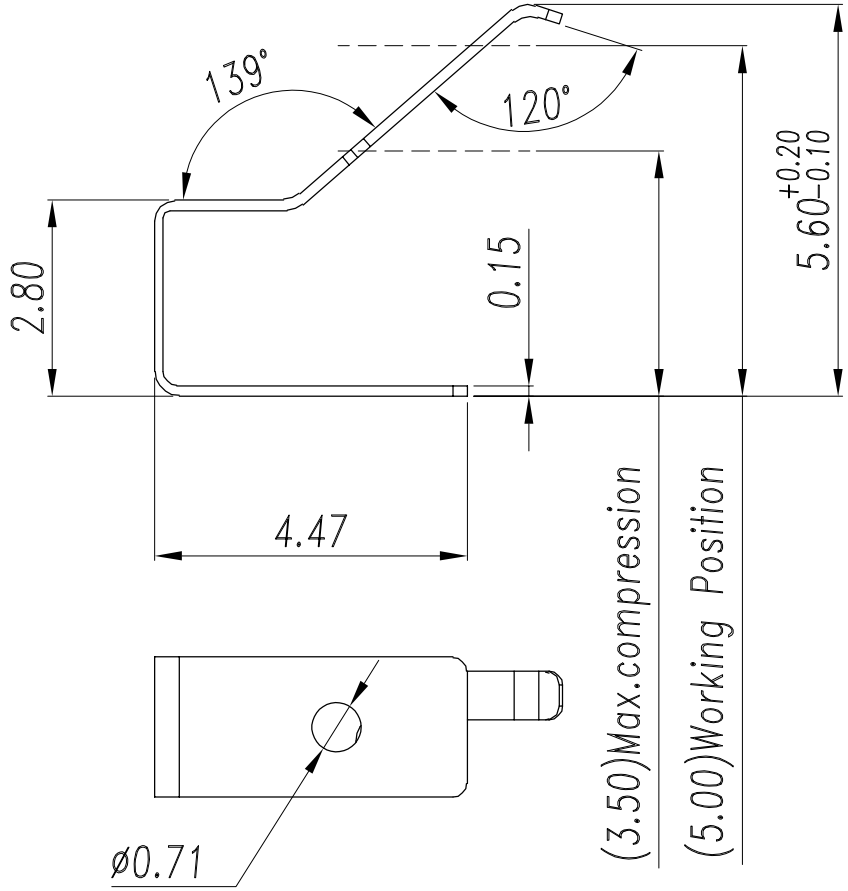

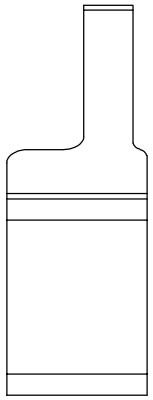

备注：

1. 材质：SUS301-H(HV:430~450)
   T=0.15±0.01mm,
2. 毛边:0.1以下，标注毛边方向,
   表面不可有油污,裂痕，严重变形等不良
3. 料带1000mm长扇形4mm Max
   料带1000mm长扭转45° Max
   料带1000mm长弯曲4mm Max
4. 电镀方式：连续刷镀镍(盐雾:48H)
5. 双面式预断各个PIN都上下45度一次可折掉
6. 带* 尺寸为重点管控尺寸

MATERIAL NO.: JK-0R5600AG0205R REVIEW TABLE FOR DETAILS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
QUALITY SYMBOL ▽=0 ▶=0 GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.25 X. ±4.0° .X ±0.20 .X ±3.0° .XX ±0.15 .XX ±2.0°	TITLE: 弹片 5.82*2.00*5.60H JKF connectivity J K F Technology Co.,Ltd DOCUMENT NO. SHEET NO. 1 OF 1 DIMENSION STYLE: MM ONLY DESIGN UNITS: METRIC SCALE: --- THIRD ANGLE PROJECTION	ECN DESCRIPTION: RELEASE TO TOOLING DRAWN BY: KATE DENG DATE: CHECKED BY: FAND DATE: ----- APPROVED BY: Wang Yan DATE: ------

frame size: A4
Rev.A