

RoHS Compliant

REV	ECN No.	DATE	REMARK
A	原始图档	2022.04.09	

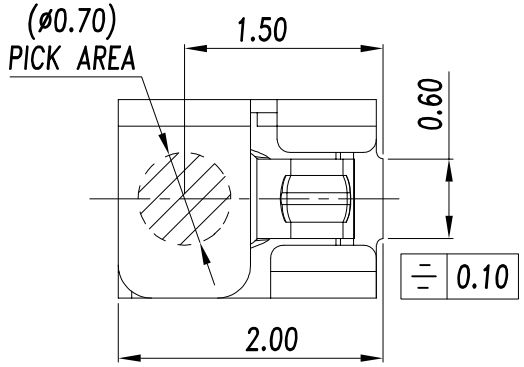


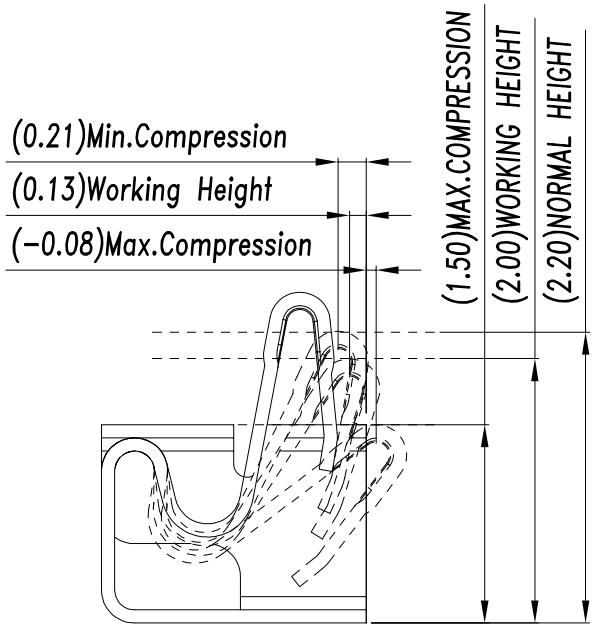



WORKING POSITION

PRODUCT NO.


1. SPECIFICATIONS:
   - 1.1. CONTACT RESISTANCE:80 mΩ MAX
   - 1.2. VOLTAGE RATING:1.5V/AC/DC/MAX
   - 1.3. CURRENT RATING:1.0A/MAX
   - 1.4. PRE-LOAD FORCE:0.5±0.1N ON CONTACT POINT
   - 1.5. MAX.BEAM DEFLECTION:0.7±0.1N ON CONTACT POINT
   - 1.6. DURABILITY:2000 CYCLES
   - 1.7. OPERATING TEMPERATURE:-20°C~80°C
2. MATERIAL:
   - 2.1. STAINLESS STEEL T=0.10±0.005MM
3. FINISH:
   - 3.1. 30u" MIN. NICKEL UNDERPLATING OVERALL

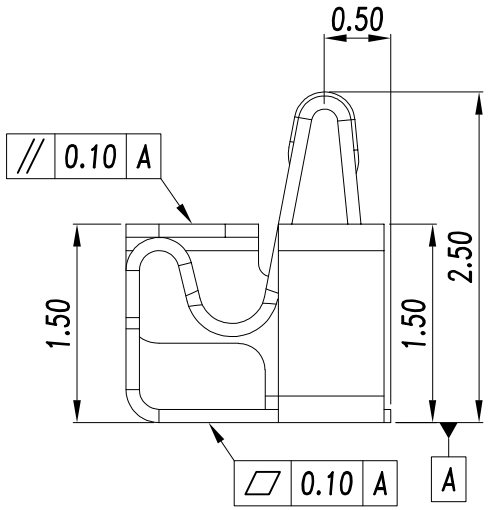

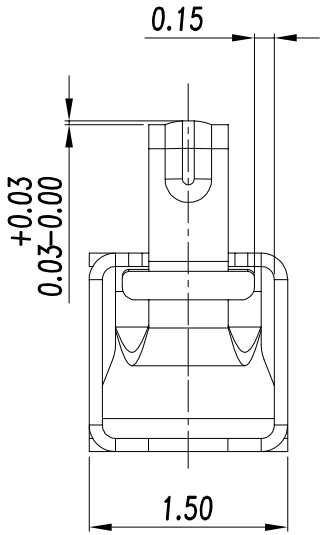

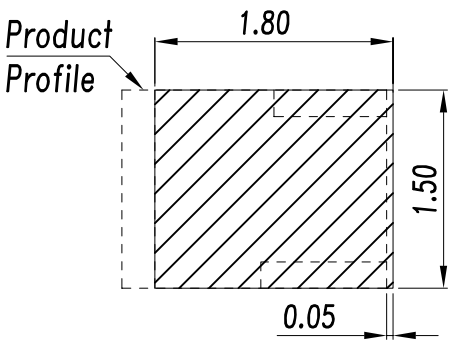

RECOMMENDED PCB LAYOUT
TOLERANCE±0.05(焊盘推荐图)

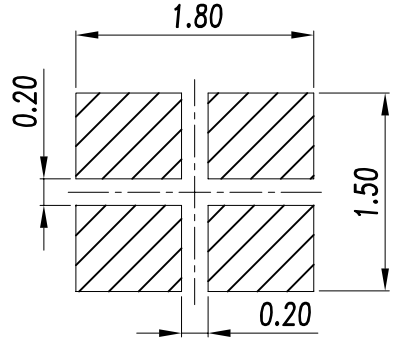

METAL MASK T=0.10
TOLERANCE±0.05(钢网推荐图)

MATERIAL NO.:
JK-0R2500AG0034R
REVIEW TABLE FOR DETAILS

QUALITY SYMBOL
C = 0
12

GENERAL TOLERANCES (UNLESS SPECIFIED)

X. ±0.25	X. ±4.0°
.X ±0.20	.X ±3.0°
.XX ±0.15	.XX ±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE: 天线弹片 2.00*1.50*2.50H(F款)

ECN DESCRIPTION: RELEASE TO TOOLING

DRAWN BY: KATE DENG DATE:

CHECKED BY: FAND DATE: -----

APPROVED BY: Wang Yan DATE: ------

JKF connectivity J K F Technology Co.,Ltd

DOCUMENT NO.

SHEET NO. 1 OF 1

DIMENSION STYLE: MM ONLY

DESIGN UNITS: METRIC

SCALE: 10:1

THIRD ANGLE PROJECTION

frame size: A4
Rev.A 2022.04.09