





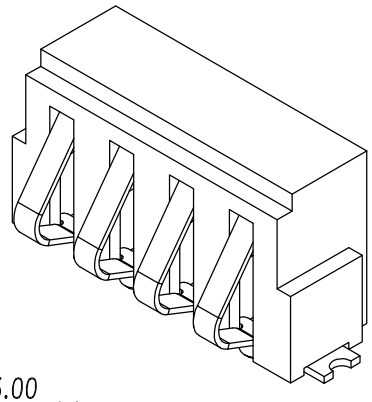

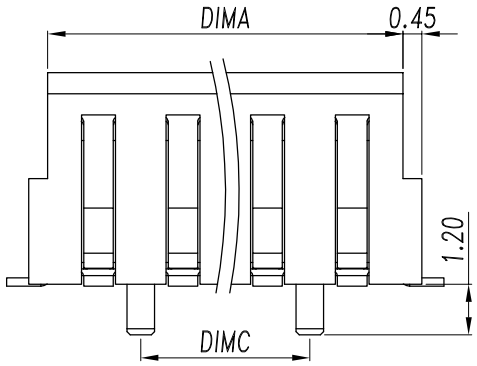

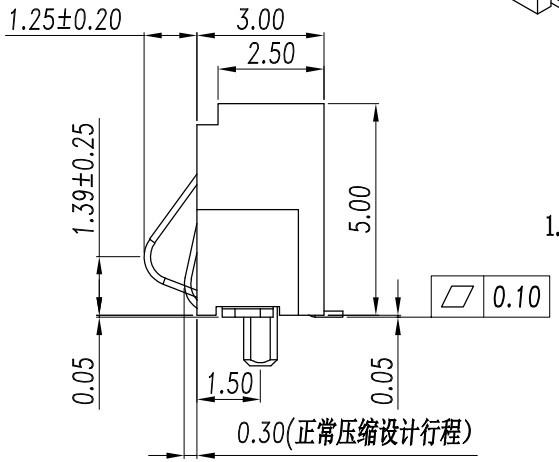


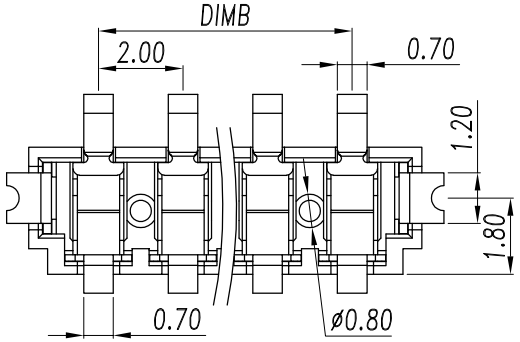

JK-BS5006AGB042R	12.40	10.00	8.00
JK-BS5005AGB042R	10.40	8.00	6.00
JK-BS5004AGB042R	8.40	6.00	4.00
JK-BS5003AGB042R	6.40	4.00	2.00
JK-BS5002AGB042R	4.40	2.00	0
PART NO.	DIMA	DIMB	DIMC

2.装配方向

1.装配方向



-NOTES-


1.Electrical:
Contact resistance:50m ohms max.
Dielectric withstanding voltage:250V RMS.
Insulation resistance:1000M ohms min.

2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE:2.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:3000cycles MIN.

3.Environment:
Operating Temperature:-55°to+105°.

4.FINISH:
TERMINAL: GOLD Plated ALL Over NICKEL.

5.MATERIAL:
5.1.Housing:HI-TEMP Plastic,UL94V-0,black;
5.2.Terminal:Coppy alloy,T=0.15mm
5.3 Stator:Brass T=0.20mm

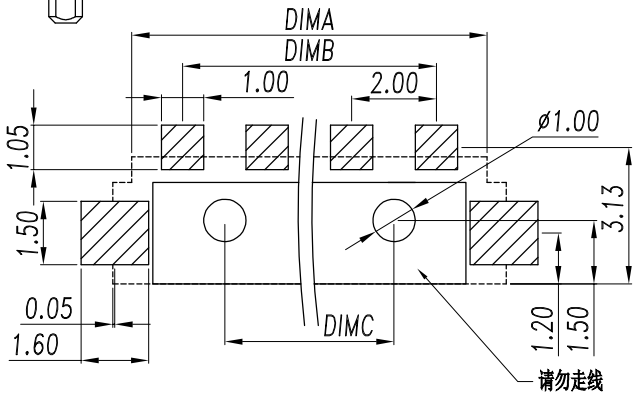

RECOMMENDED PCB LAYOUT,TOL:(±0.05)

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
	X. ±0.25	FINISHED		SEE NOTES	
	.X ±0.20	APPROCED		KATE DENG	
	.XX ±0.15	CHECKED		KATE DENG	
	.XXX ±0.10	DESIGN		FAND	
ANGLE	X. ±3.0°	DRAWN		Wang Yan	
	.X ±2.0°				
	.XX ±1.0°				

杰康富精密电子有限公司
J K F precision Electronics Co.LTD

TITLE:	电池座 2.00PH 5.0H 有柱 2-6P
PART NO.	JK-BS50XXAGB042R
DRAWING NO.	
SCALE 1:1	SIZE A4 SHEET 1 OF 1 REV. A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A4
Rev.A2013/09/10