



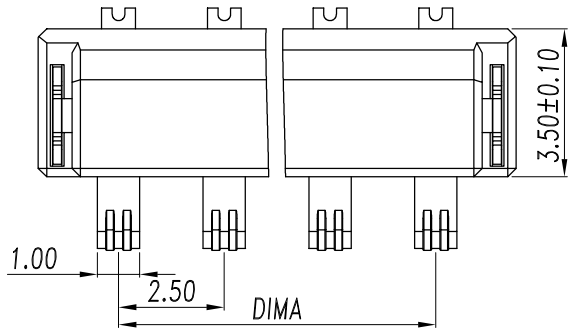


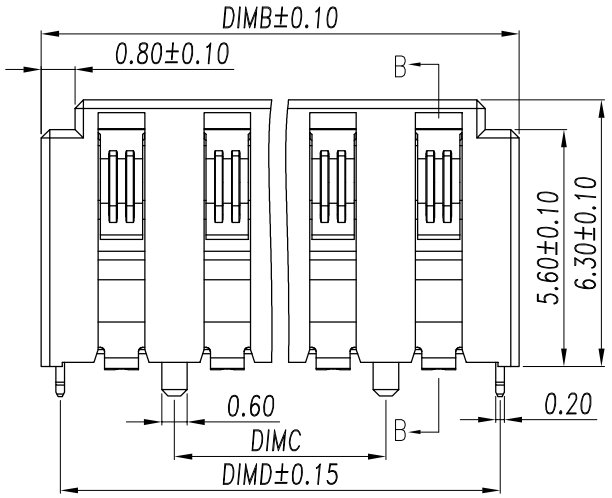

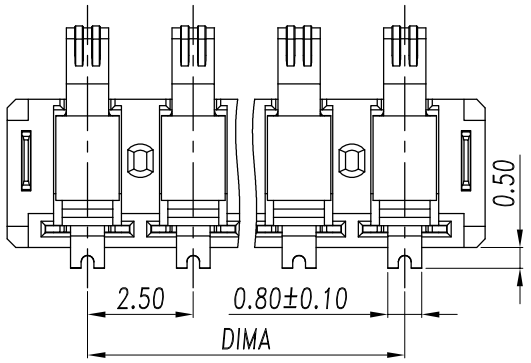

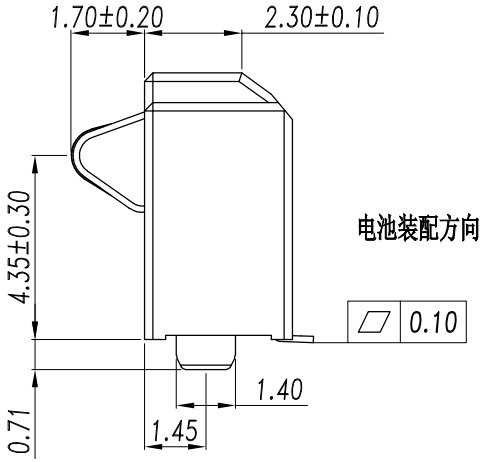

B-B

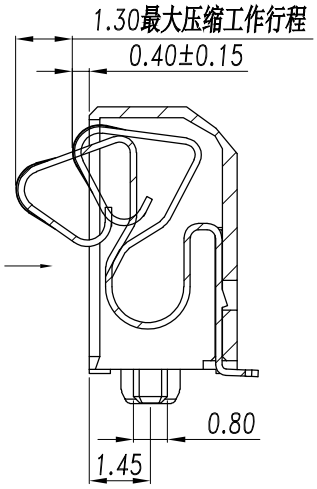

电池装配方向

-NOTES-


1.Electrical:
- Contact resistance:50m ohms max.
- Dielectric withstanding voltage:250V RMS.
- Insulation resistance:1000M ohms min.

2.Mechanical:
- MATE AND UNMATE FORCE:
- MATE FORCE:1.5kg MAX
- UNMATE FORCE:0.3kg MIN
- Durability:3000cycles MIN.

3.Environment:
- Operating Temperature:-55°to+105°.

4.FINISH:
- TERMINAL: GOLD Plated ALL Over NICKEL.

5.MATERIAL:
- 5.1.Housing:HI-TEMP Plastic,UL94V-0,black;
- 5.2.Terminal:Coppy alloy,T=0.15mm
- 5.3 Stator:Brass T=0.20mm

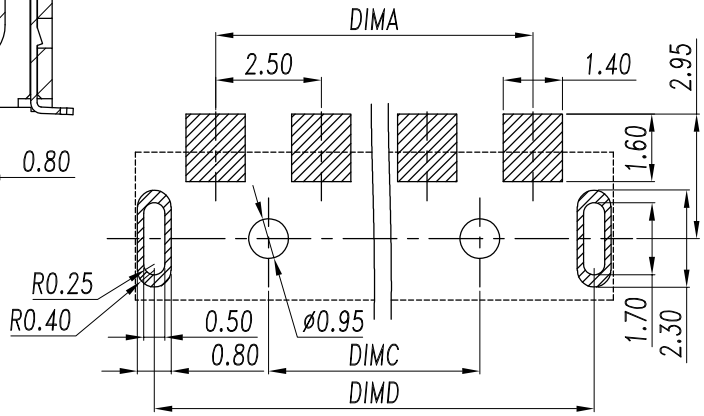

RECOMMENDED PCB LAYOUT,TOL:(±0.05)

JK-BS6306AGB043R	12.50	16.30	10.00	15.40
JK-BS6305AGB043R	10.00	13.80	7.50	12.90
JK-BS6304AGB043R	7.50	11.30	5.00	10.40
PART NO.	DIMA	DIMB	DIMC	DIMD

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
	X. ±0.25	FINISHED		SEE NOTES	
	.X ±0.20	APPROCED		KATE DENG	
	.XX ±0.15	CHECKED		KATE DENG	
	.XXX ±0.10	DESIGN		FAND	
ANGLE	X. ±3.0°	DRAWN		Wang Yan	
	.X ±2.0°				
	.XX ±1.0°				

杰康富精密电子有限公司
J K F precision Electronics Co.LTD

TITLE:	电池座 2.50PH 6.3H 有柱 4-6PIN						
PART NO.	JK-BS63XXAGB043R						
DRAWING NO.							
SCALE	1:1	SIZE	A4	SHEET	1 OF 1	REV.	A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A4
Rev.A2013/09/10