

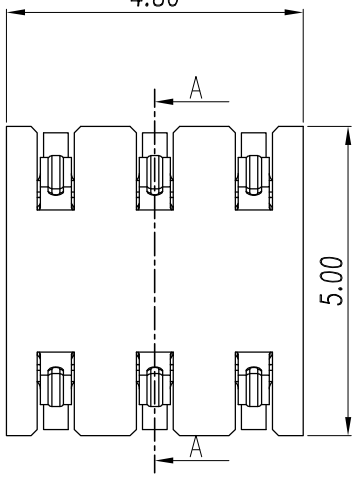


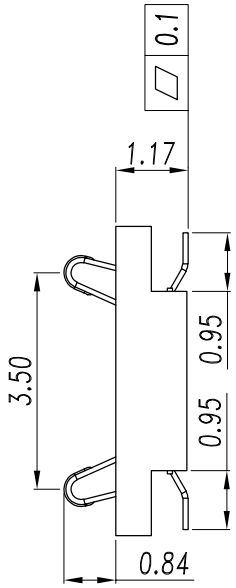

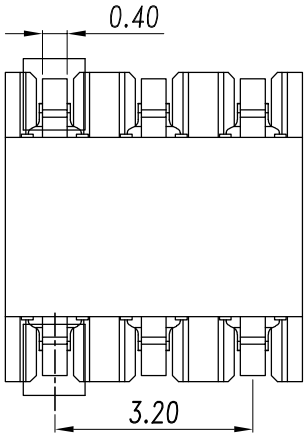

-NOTES-


1.Electrical:
Contact resistance:50m ohms max.
Dielectric withstanding voltage:250V RMS.
Insulation resistance:1000M ohms min.


2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE:0.5kg MAX
UNMATE FORCE:0.1kg MIN
Durability:3000cycles MIN.

3.Environment:
Operating Temperature:-55°to+105°.

4.FINISH:
TERMINAL: GOLD Plated ALL Over NICKEL.


5.MATERIAL:
5.1.Housing:HI-TEMP Plastic,UL94V-0,black;
5.2.Terminal:Coppy alloy,T=0.08mm

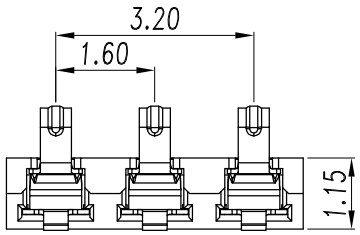


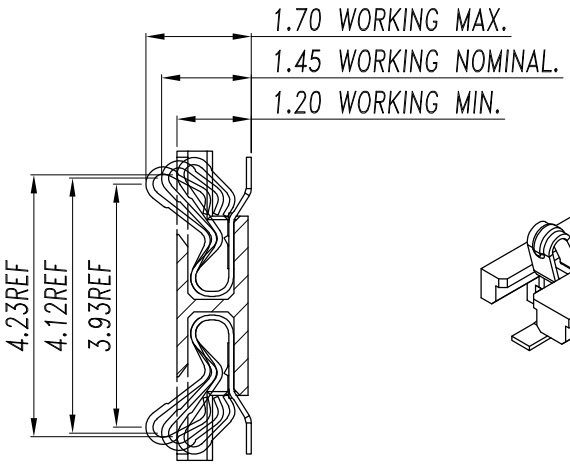

RECOMMEND WORKING RANGE.

剖面 A-A

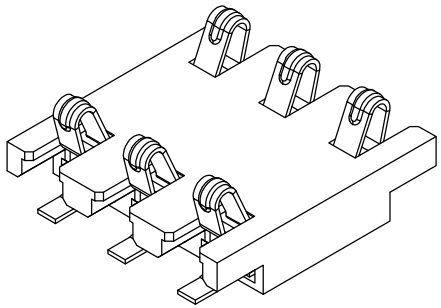

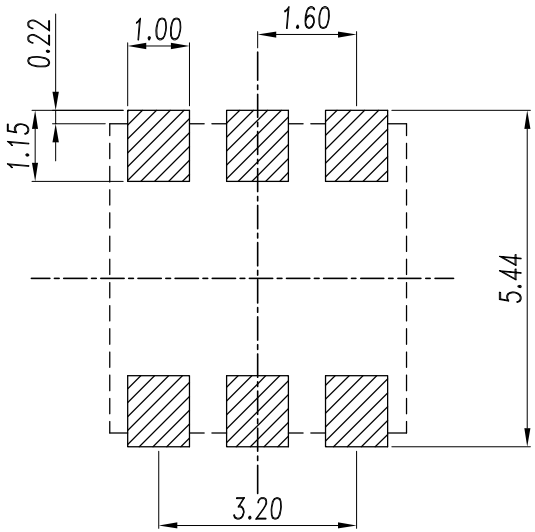

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

GENERAL TOLERANCES	UNIT	mm	
DISTANCE X.	MATERIAL	SEE NOTES	
X. ±0.25	FINISHED	SEE NOTES	
.X ±0.20	APPROCED	KATE DENG	
.XX ±0.15	CHECKED	KATE DENG	
.XXX ±0.10	DESIGN	FAND	
ANGLE	DRAWN	Wang Yan	
X. ±3.0°			
.X ±2.0°			
.XX ±1.0°			

JKF Connectivity 杰康富精密电子有限公司
J K F precision Electronics Co.LTD

TITLE:	电池座 1.60PH 1.2H 无柱 6P
PART NO.	JK-BS1106AGB037R
DRAWING NO.	
SCALE 1:1	SIZE A4 SHEET 1 OF 1 REV. A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A4
Rev.A2013/09/10