


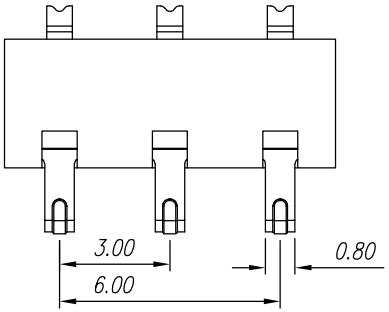


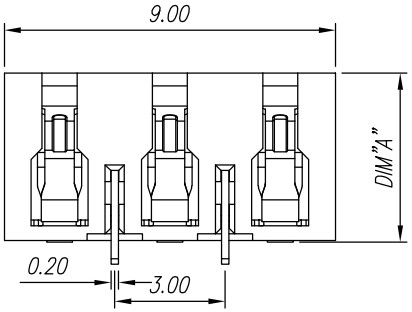

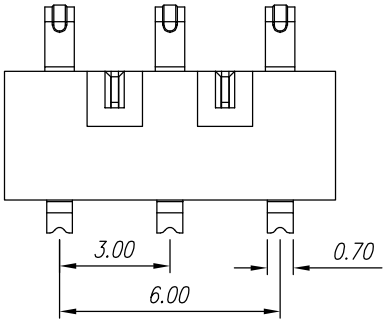

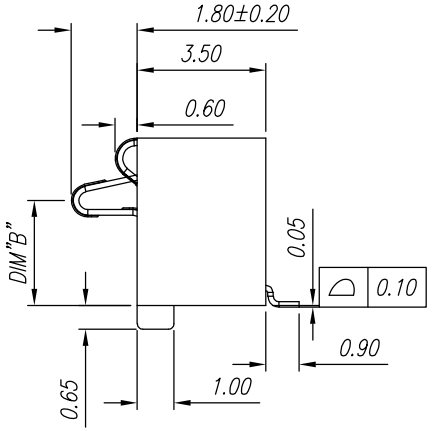

JK-BS7203AGB003R	7.20	5.46
JK-BS6503AGB003R	6.50	4.76
JK-BS5003AGB003R	5.00	3.26
JK-BS4603AGB003R	4.60	2.86
Be filled	DIMA	DIMB

-NOTES-


1.Electrical:
- Contact resistance:50m ohms max.
- Dielectric withstanding voltage:250V RMS.
- Insulation resistance:1000M ohms min.
- VOLTAGE: 12V
- CURRENT RATING: 2.0A MAX.

2.Mechanical:
- MATE AND UNMATE FORCE:
- MATE FORCE:4.5kgf MAX.
- UNMATE FORCE:0.5kgf MIN.
- Durability:1500cycles MIN.

3.Environment:
- Operating Temperature:-55℃~+105℃.

4.FINISH:
- TERMINAL: GOLD Plated ALL Over NICKEL.
  1u" GOLD PLATING ON CONTACT AREA.

5.COLOR:
- HOUSING:BLACK.

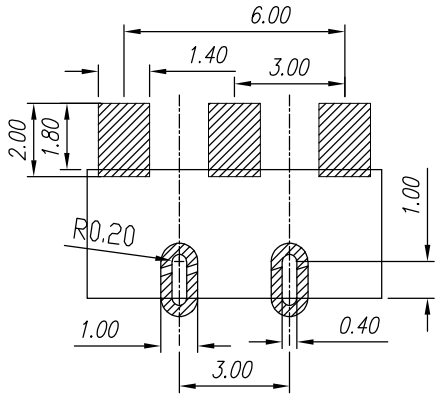

RECOMMENDED PCB LAYOUT

TOL:(±0.05)

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
X.	±0.25	FINISHED		SEE NOTES	
.X	±0.20	APPROCED		KATE DENG	
.XX	±0.15	CHECKED		KATE DENG	
.XXX	±0.10	DESIGN		FAND	
ANGLE		DRAWN		Wang Yan	
X.	±3.0°				
.X	±2.0°				
.XX	±1.0°				

JKF Connectivity 杰康富精密电子有限公司 JKF precision Electronics Co., LTD

TITLE:	3.0PH BATTERY 无柱 DIP型(4.6H-7.5H)
PART NO.	JK-BSxx03AGB003R
DRAWING NO.	20200515-02
SCALE 1:1	SIZE A3 SHEET 1 OF 1 REV. A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A3
Rev.F2013/09/10