

-NOTES-


1.Electrical:
- Contact resistance:50m ohms max.
- Dielectric withstanding voltage:250V RMS.
- Insulation resistance:1000M ohms min.


2.Mechanical:
- MATE AND UNMATE FORCE:
- MATE FORCE:2.5kg MAX
- UNMATE FORCE:0.5kg MIN
- Durability:3000cycles MIN.


3.Environment:
- Operating Temperature:-55°to+105°.


4.FINISH:
- TERMINAL: GOLD Plated ALL Over NICKEL.


5.MATERIAL:
- 5.1.Housing:HI-TEMP Plastic,UL94V-0,black;
- 5.2.Terminal:Coppy alloy,T=0.15mm
- 5.3 Stator:Brass T=0.20mm

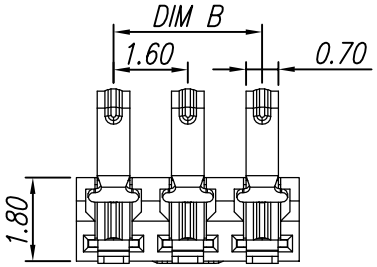


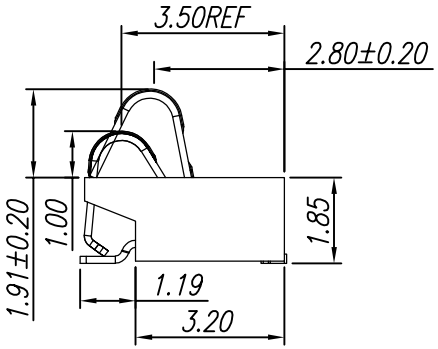





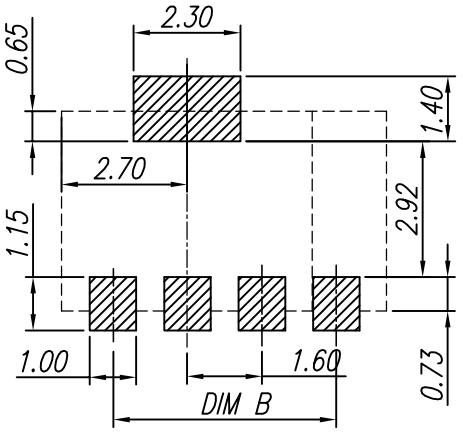

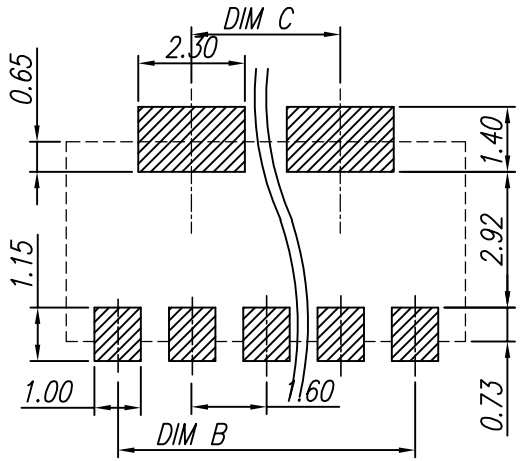

RECOMMENDED PCB LAYOUT

TOL:(±0.05)

JK-BA1810AGB002R	16.00	14.40	11.20
JK-BA1809AGB002R	14.40	12.80	9.60
JK-BA1808AGB002R	12.80	11.20	8.00
JK-BA1807AGB002R	11.20	9.60	6.40
JK-BA1806AGB002R	9.60	8.00	4.80
JK-BA1805AGB002R	8.00	6.40	3.20
JK-BA1804AGB002R	6.40	4.80	0
JK-BA1803AGB002R	4.80	3.20	0
BE FIILED	DIMA	DIMB	DIMC

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
	X. ±0.25	FINISHED		SEE NOTES	
	.X ±0.20	APPROCED	KATE DENG		
	.XX ±0.15	CHECKED	KATE DENG		
	.XXX ±0.10	DESIGN	FAND		
ANGLE	X. ±3.0°	DRAWN	Wang Yan		
	.X ±2.0°				
	.XX ±1.0°				

JKF Connectivity 杰康富精密电子有限公司 J K F precision Electronics Co., LTD

TITLE:	1.60PH 1.8H 无柱3-10P 端子弹高1.9H
PART NO.	JK-BS18××AGB002R
DRAWING NO.	C119-20200525-01
SCALE 1:1 / SIZE A3 / SHEET 1 OF 1 / REV. A	

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A3
Rev.F2013/09/10