





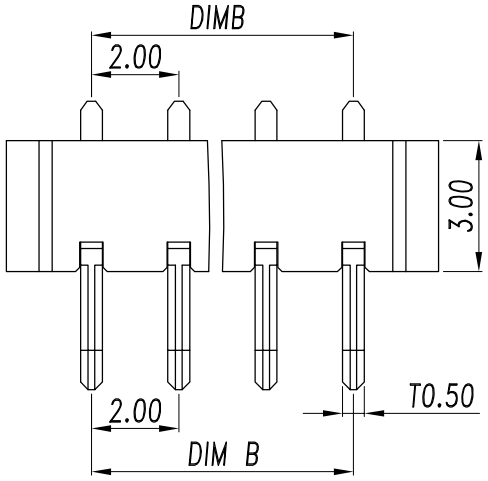

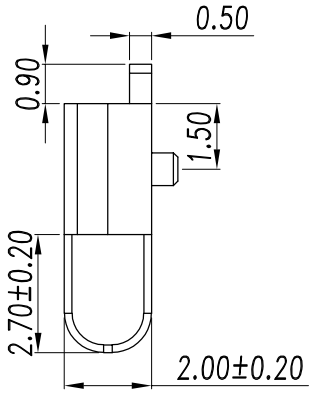

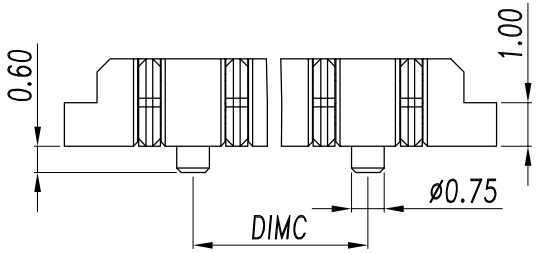

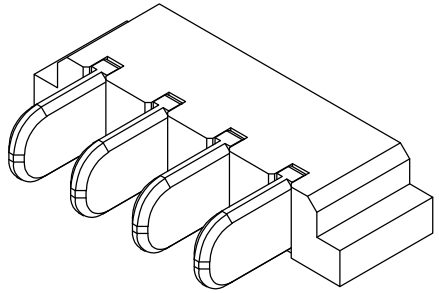

-NOTES-


1.Electrical:
Contact resistance:50m ohms max.
Dielectric withstanding voltage:250V RMS.
Insulation resistance:1000M ohms min.

2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE:2.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:3000cycles MIN.

3.Environment:
Operating Temperature:-55°to+105°.

4.FINISH:
TERMINAL: GOLD Plated ALL Over NICKEL.

5.COLOR:
HOUSING:BLACK.

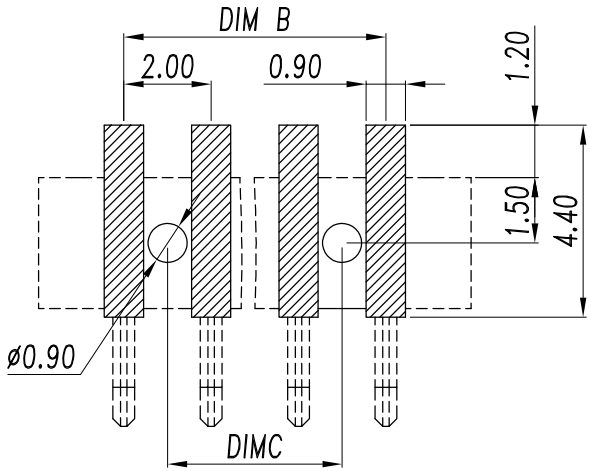

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)

6	JK-BS2006AGB055R	13.90	10.00	8.00
5	JK-BS2005AGB055R	11.90	8.00	6.00
4	JK-BS2004AGB055R	9.90	6.00	4.00
3	JK-BS2003AGB055R	7.90	4.00	2.00
2	JK-BS2002AGB055R	5.90	2.00	
Pin NO.	Product NO.	DIMA	DIMB	DIMC

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
X.	±0.25	FINISHED		SEE NOTES	
.X	±0.20	APPROCED		KATE DENG	
.XX	±0.15	CHECKED		KATE DENG	
.XXX	±0.10	DESIGN		FAND	
ANGLE		DRAWN		Wang Yan	
X.	±3.0°				
.X	±2.0°				
.XX	±1.0°				

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

JKF Connectivity

杰康富精密电子有限公司
JKF Precision Electronics Co., Ltd.

TITLE:	电池座 2.00PH M 2.0H 有柱 SMT						
PART NO.	JK-BS20XXAGB055R						
DRAWING NO.							
SCALE	1:1	SIZE	A4	SHEET	1 OF 1	REV.	A

Frame_A4
Rev.A