


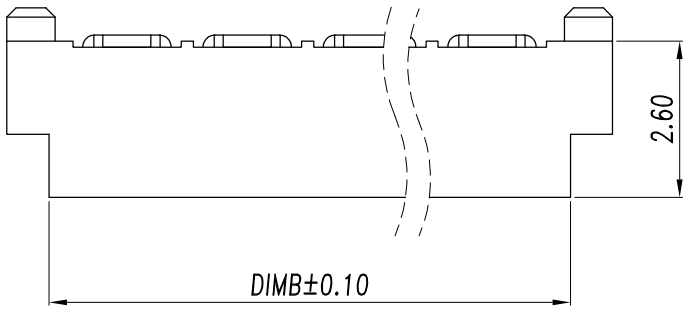


Pin NO.	Product NO.	DIMA	DIMB	DIMC
10	JK-BT2610AGB028R	22.00	20.60	21.20
9	JK-BT2609AGB028R	20.00	18.60	19.20
8	JK-BT2608AGB028R	18.00	16.60	17.20
7	JK-BT2607AGB028R	16.00	14.60	15.20
6	JK-BT2606AGB028R	14.00	12.60	13.20
5	JK-BT2605AGB028R	12.00	10.60	11.20
4	JK-BT2604AGB028R	10.00	8.60	9.20
3	JK-BT2603AGB028R	8.00	6.60	7.20


NOTES:
1 MATERIAL:
HOUSING:THERMOPLASTIC LCP,UL 94V-0,30%G/F FILLED;
COLOR:BLACK
CONTACT:COPPER ALLOY T=0.20mm
2 FINISH:
CONTACT:10u″ GOLD PLATING ON CONTACT AREA
G/F PLATING ON SOLDERTAILS
50u″ MIN.NICKEL UNDERPLATING OVER ALL
3 SPECIFICATION:
3.1 CURRENT RATING: 5.0A MAX.
3.2 VOLTAGE: 250 VAC
3.3 TEMPERATURE RANGE:-55 ℃~ 85 ℃
3.4 CONTACT RESISTANCE: 100 MILLIONHM MAX.
3.5 DIELECTRIC WITHSTANDING VOLTAGE: 350 VAC r.m.s
3.6 INSULATION RESISTNACE: 100 MEGOHMS MIN

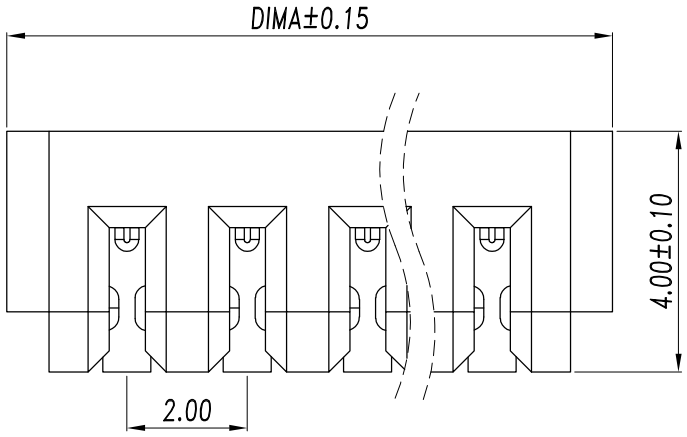


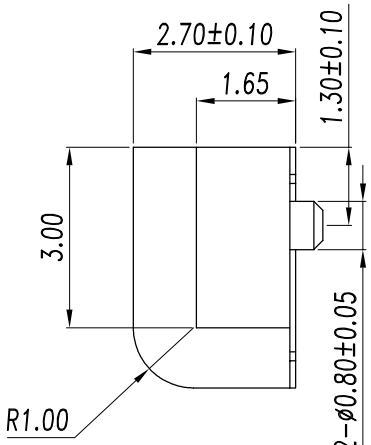

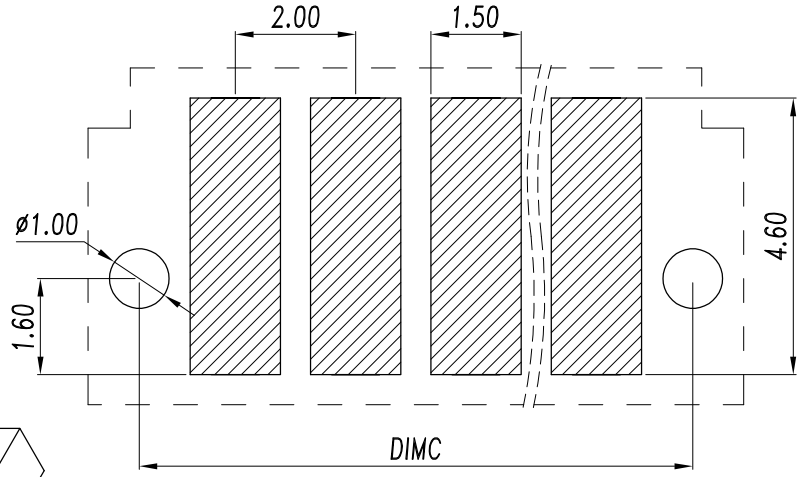

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

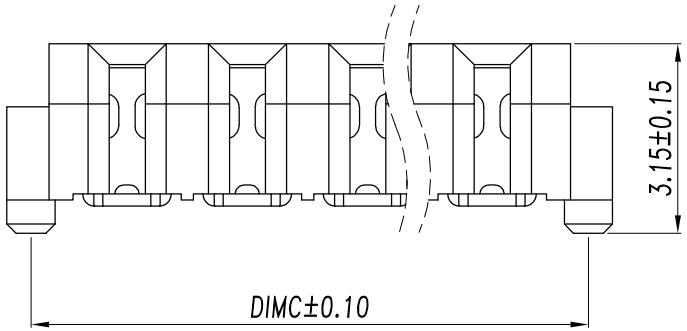

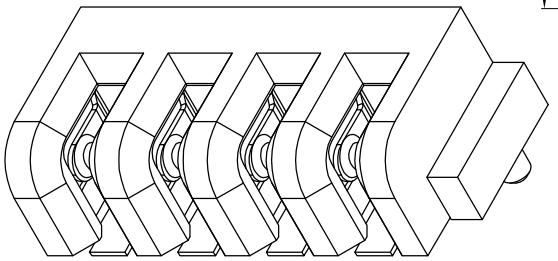

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X. ±0.25	MATERIAL		SEE NOTES	
	.X ±0.20	FINISHED		SEE NOTES	
	.XX ±0.15	APPROCED	KATE DENG		
	.XXX ±0.10	CHECKED	KATE DENG		
ANGLE	X. ±3.0°	DESIGN	FAND		
	.X ±2.0°	DRAWN	Wang Yan		
	.XX ±1.0°				

JKF Connectivity 杰康富精密电子有限公司 J K F precision Electronics Co., LTD

TITLE:	Battery 3-10P PH2.0 H=2.6mm母座						
PART NO.	JK-BT26XXAGB028R						
DRAWING NO.							
SCALE	1:1	SIZE	A4	SHEET	1 OF 1	REV.	A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A4
Rev.F2013/09/10