




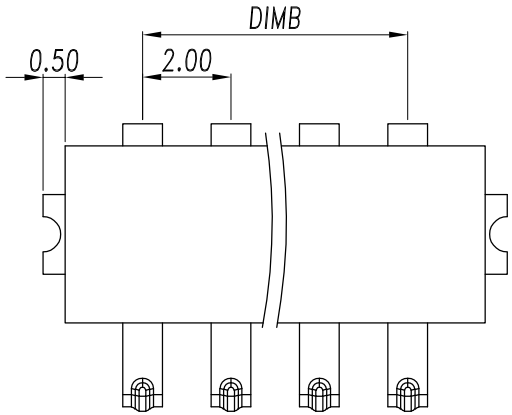


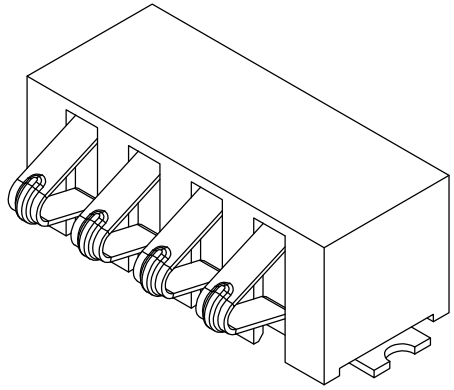

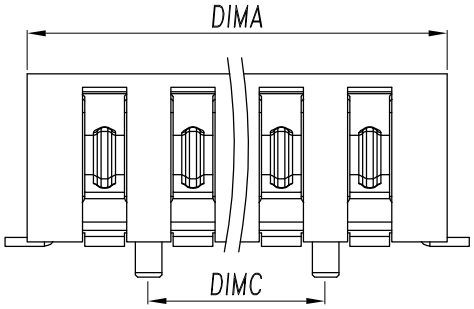

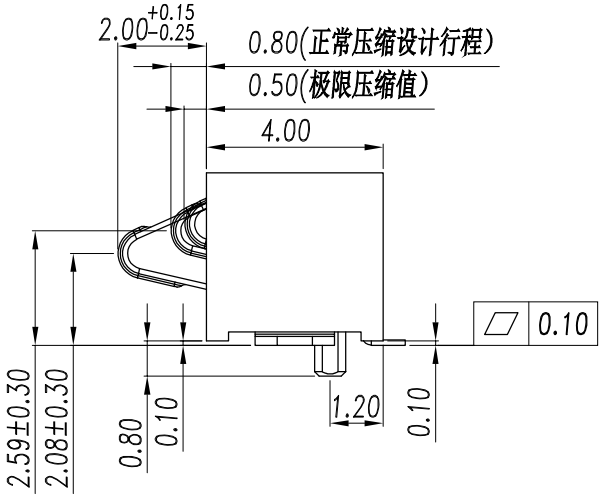

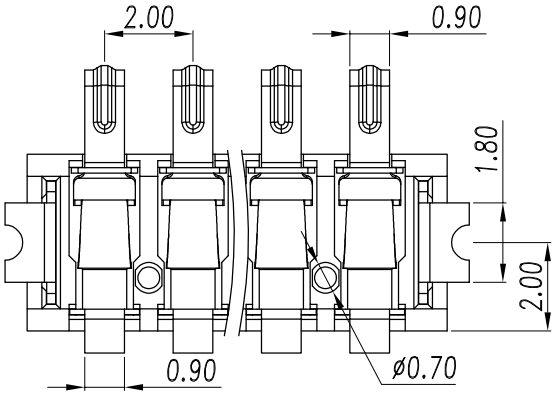



-NOTES-

1.Electrical:
Contact resistance:50m ohms max.
Dielectric withstanding voltage:250V RMS.
Insulation resistance:1000M ohms min.


2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE:2.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:3000cycles MIN.

3.Environment:
Operating Temperature:-55°to+105°.

4.FINISH:
TERMINAL: GOLD Plated ALL Over NICKEL.

5.MATERIAL:
5.1.Housing:HI-TEMP Plastic,UL94V-0,black;
5.2.Terminal:Coppy alloy,T=0.12mm
5.3 Stator:Brass T=0.20mm

JK-BS3806AGB038R	13.50	10.00	8.00
JK-BS3805AGB038R	11.50	8.00	6.00
JK-BS3804AGB038R	9.50	6.00	4.00
JK-BS3803AGB038R	7.50	4.00	2.00
JK-BS3802AGB038R	5.50	2.00	0
PART NO.	DIMA	DIMB	DIMC

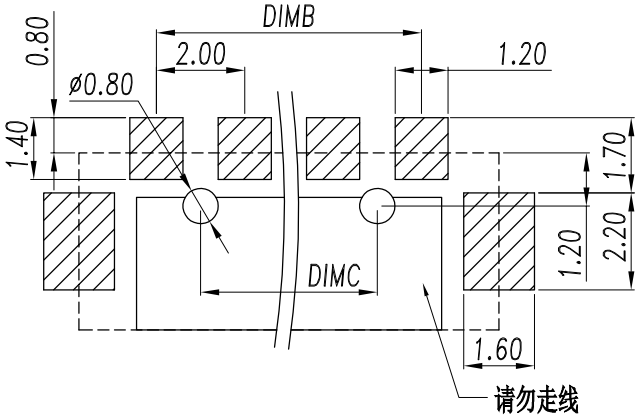

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
	X. ±0.25	FINISHED		SEE NOTES	
	.X ±0.20	APPROCED	KATE DENG		
	.XX ±0.15	CHECKED	KATE DENG		
	.XXX ±0.10	DESIGN	FAND		
ANGLE	X. ±3.0°	DRAWN	Wang Yan		
	.X ±2.0°				
	.XX ±1.0°				

JKF Connectivity 杰康富精密电子有限公司
J K F precision Electronics Co.LTD

TITLE:	电池座 2.00PH 3.8H 有柱 2-6P
PART NO.	JK-BS38XXAGB038R
DRAWING NO.	
SCALE 1:1	SIZE A4 SHEET 1 OF 1 REV. A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A4
Rev.A2013/09/10