


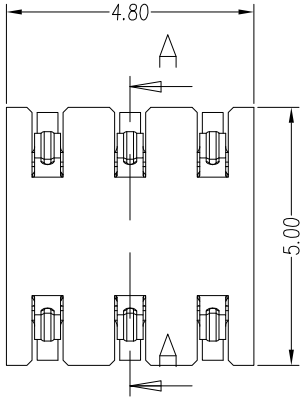


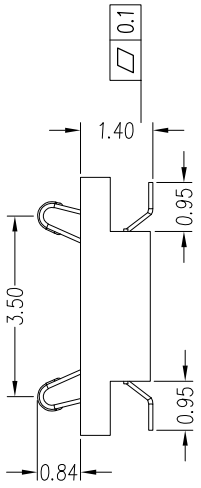

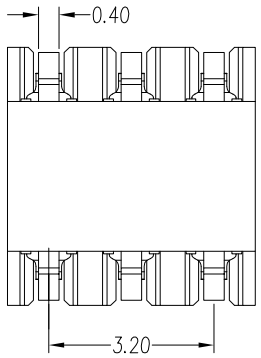

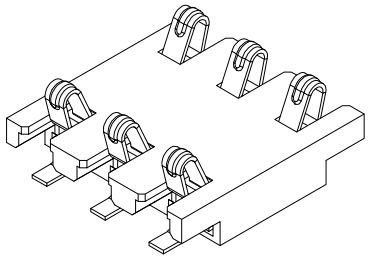

-NOTES-


1.Electrical:
Contact resistance: 50m ohms max.
Dielectric withstanding voltage: 250V RMS.
Insulation resistance: 1000M ohms min.


2.Mechanical:
NORMAL FORCE: 0.2N MIN
Durability: 3000cycles MIN.

3.Environment:
Operating Temperature: -55°to+105°.

4.FINISH:
TERMINAL: GOLD Plated ALL Over NICKEL.


5.MATERIAL:
5.1.Housing: HI-TEMP Plastic,UL94V-0,black;
5.2.Terminal: Coppy alloy,T=0.08mm



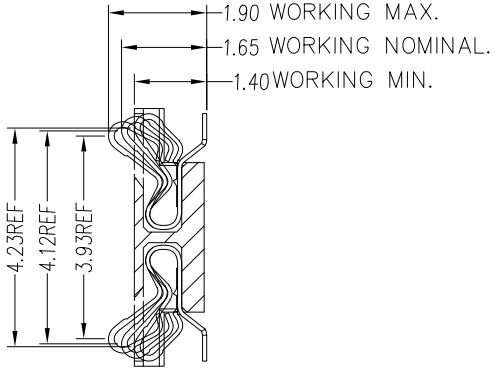


RECOMMEND WORKING RANGE.

剖面 A-A

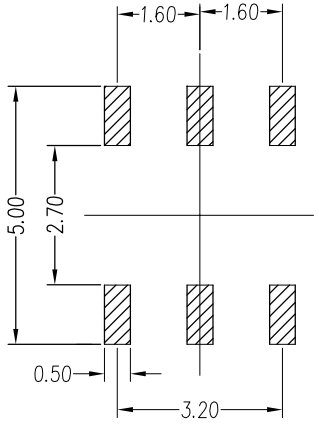

RECOMMENDED PWB LAYOUT
TOL:(±0.05)

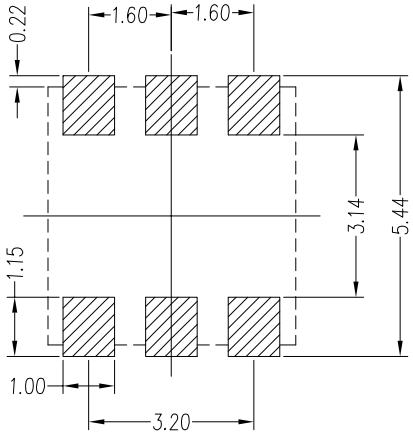

RECOMMENDED PCB LAYOUT
TOL:(±0.05)


GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
X.	±0.25	FINISHED		SEE NOTES	
.X	±0.20	APPROCED		KATE DENG	
.XX	±0.15	CHECKED		KATE DENG	
.XXX	±0.10	DESIGN		FAND	
ANGLE		DRAWN		Wang Yan	
X.	±3.0°				
.X	±2.0°				
.XX	±1.0°				


JKF Connectivity 杰康富精密电子有限公司
J K F precision Electronics Co., LTD


TITLE:	电池座 1.60PH 1.4H 无柱 6P					
PART NO.	JK-BS1406AGB012R					
DRAWING NO.	BATC12-06-02					
SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV. A


REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED


Frame_A3
Rev.F2013/09/10

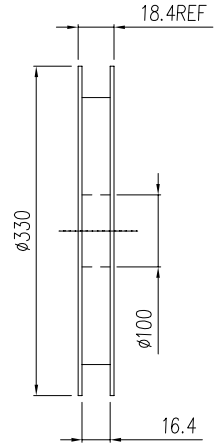

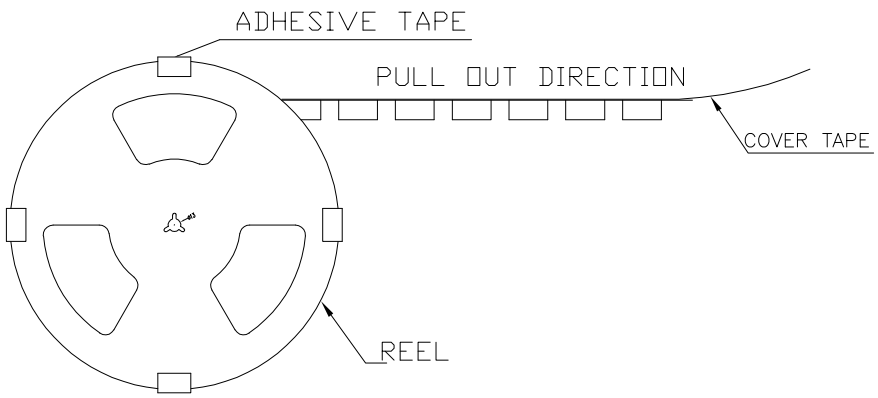

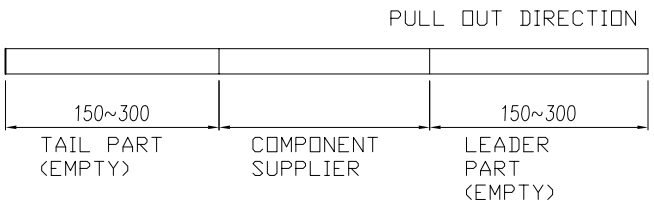

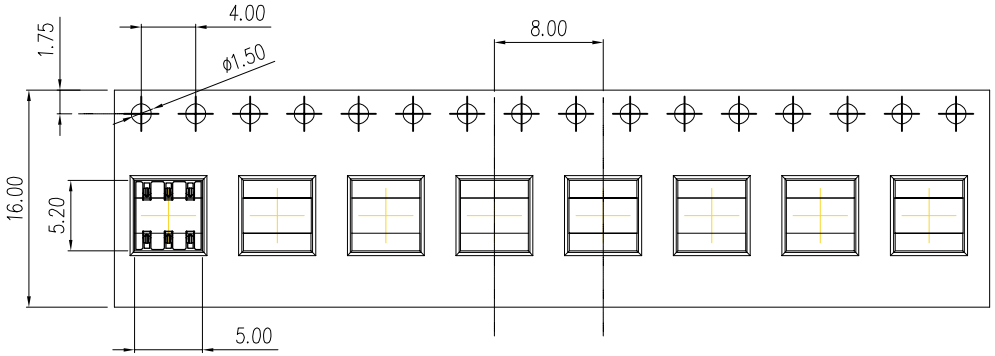



NOTE:
1. CARRY TAPE前部分与尾部分各留出150~300mm长度不装产品
2. 每穴放置1PCS产品，放置方式如图所示
3. 包装机包好后再缠上一圈电周波，在REEL的四
   个等分点贴上胶带，以防止REEL张开；每REEL贴1PCS标签
4. 包装数量：2000PCS/REEL，15REEL/CARTON，共30000PCS/CARTON
5. 先在纸箱底部垫上1PCS硬纸板，四角垫上
   三角垫，然后把装好产品的REEL放进纸箱中，
   依次把15REEL产品放到纸箱中，
   最后用胶带封箱
6. COVER TAPE与CARRY TAPE剥离力：0.1N~0.7N（跳动量在0.3N内）；
   剥离角度：165°~175°；剥离速度：250~300mm/min
7. 包装方式：自粘式

项目	品　名	规　格	数量
①	6PIN BATTERY SMT	6PIN BATTERY SMT	30000PCS
②	REEL	D=ø330mm, d=ø100mm, H=16.4mm	15PCS
③	COVER TAPE	W=13.3mm, T=0.05mm	16320mm
④	CARRY TAPE	W=16mm, P=8, T=0.3mm	16320mm
⑤	硬纸板	330mm*330mm*3mm	1PCS
⑥	三角垫	150mm*133mm*67mm(T=3mm)	4PCS
⑦	纸箱	340mm*340mm*320mm	1PCS


GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
	X. ±0.25	FINISHED		SEE NOTES	
	.X ±0.20	APPROCED		KATE DENG	
	.XX ±0.15	CHECKED		KATE DENG	
	.XXX ±0.10	DESIGN		FAND	
ANGLE		DRAWN		Wang Yan	
	X. ±3.0°				
	.X ±2.0°				
	.XX ±1.0°				

JKF Connectivity　杰康富精密电子有限公司　J K F precision Electronics Co., LTD

TITLE:	电池座 1.60PH 1.4H 无柱 6P						
PART NO.	JK-BS1406AGB012R						
DRAWING NO.	BATC12-06-02						
SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.	A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A3
Rev.F2013/09/10

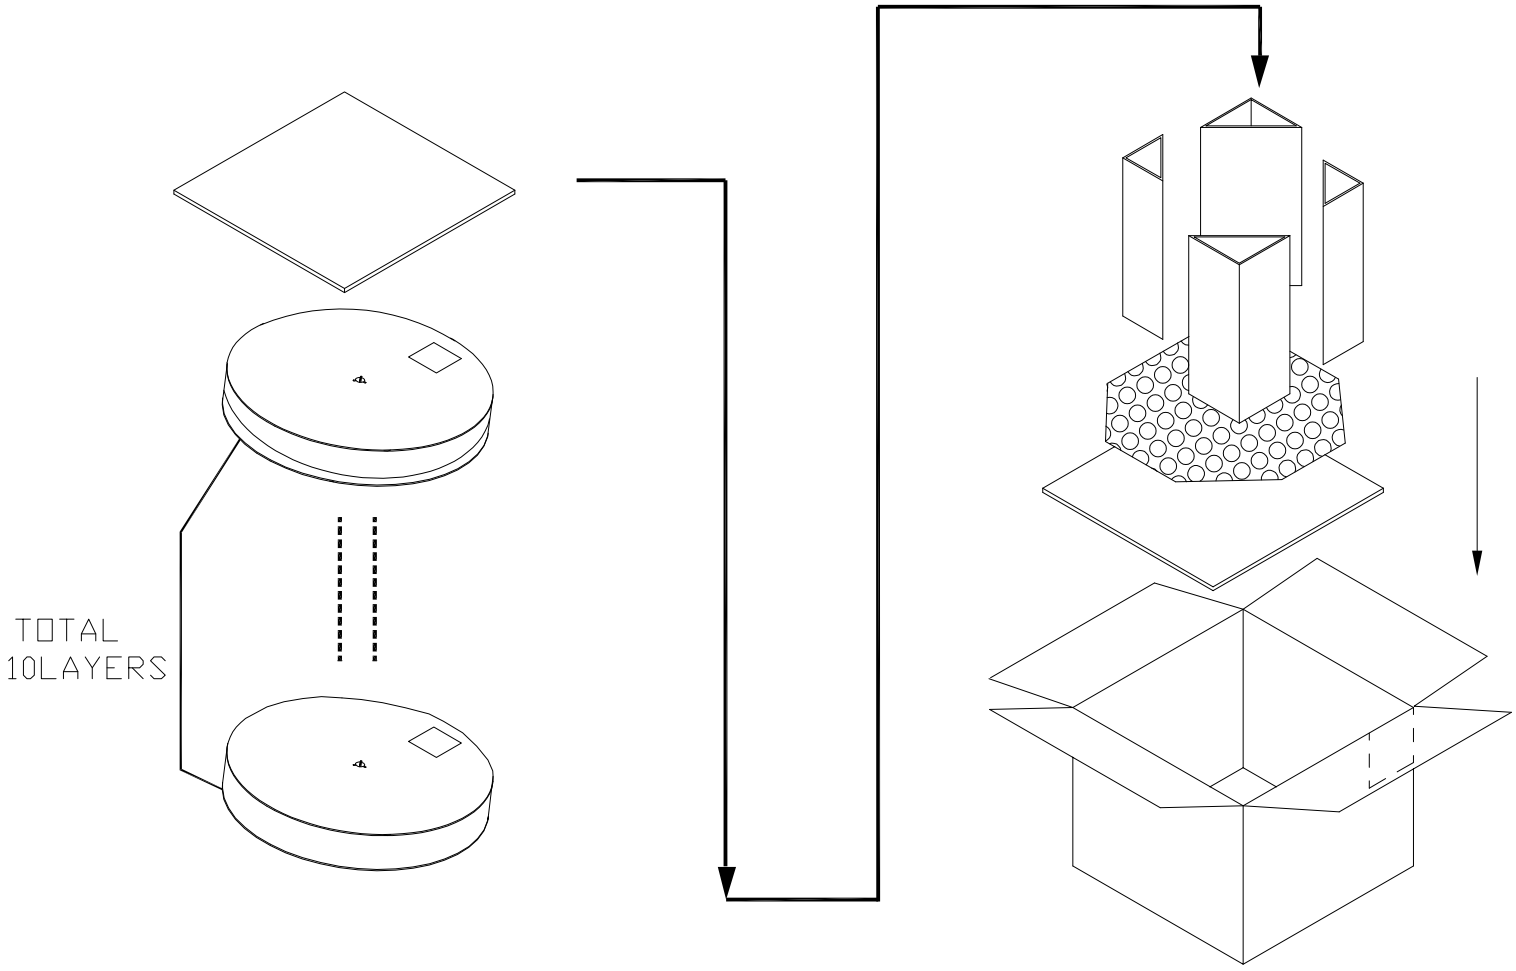

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
	X. ±0.25	FINISHED		SEE NOTES	
	.X ±0.20	APPROCED		KATE DENG	
	.XX ±0.15	CHECKED		KATE DENG	
	.XXX ±0.10	DESIGN		FAND	
ANGLE		DRAWN		Wang Yan	
	X. ±3.0°				
	.X ±2.0°				
	.XX ±1.0°				

JKF Connectivity 杰康富精密电子有限公司 J K F precision Electronics Co., LTD

TITLE:	电池座 1.60PH 1.4H 无柱 6P						
PART NO.	JK-BS1406AGB012R						
DRAWING NO.	BATC12-06-02						
SCALE	1:1	SIZE	A3	SHEET	1 OF 1	REV.	A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A3
Rev.F2013/09/10