


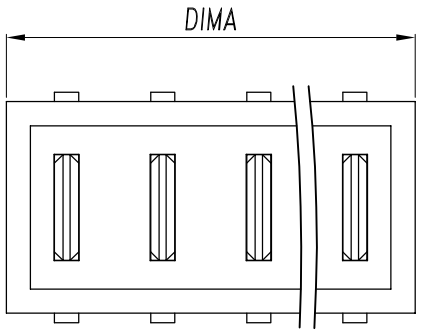


Pin Count	Product NO.	DIMA	DIMB	DIMC
10	JK-BS2610AGB027R	20.50	18.00	19.90
9	JK-BS2609AGB027R	18.50	16.00	17.90
8	JK-BS2608AGB027R	16.50	14.00	15.90
7	JK-BS2607AGB027R	14.50	12.00	13.90
6	JK-BS2606AGB027R	12.50	10.00	11.90
5	JK-BS2605AGB027R	10.50	8.00	9.90
4	JK-BS2604AGB027R	8.50	6.00	7.90
3	JK-BS2603AGB027R	6.50	4.00	5.90
2	JK-BS2602AGB027R	4.50	2.00	3.90


NOTES:
1.Electrical:
Contact resistance:50m ohms max
Dielectric withstanding voltage: 250V RMS
Insulation resistance: 1000m ohms min
2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE:2.5kg MAX
UNMATE FORCE:0.5kg MIN
Durability:3000cycles MIN
3.Environment:
Operating temperature:−55℃to+105℃
4.Finishi:
Terminal:Gold plated all over nickel
5.Color:
Housing:Black

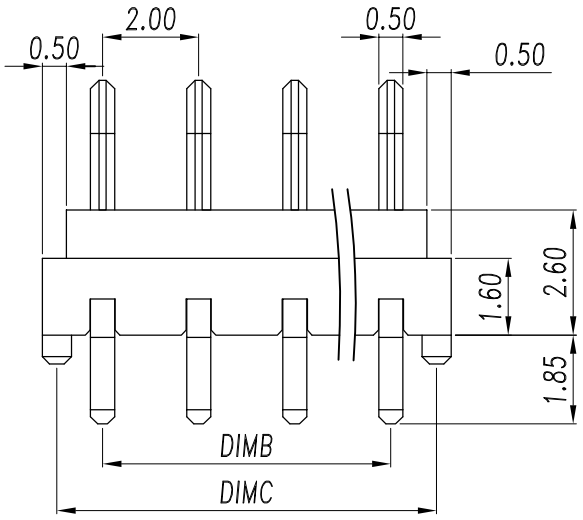


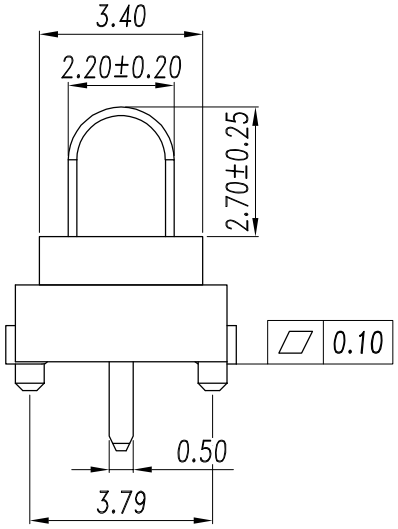

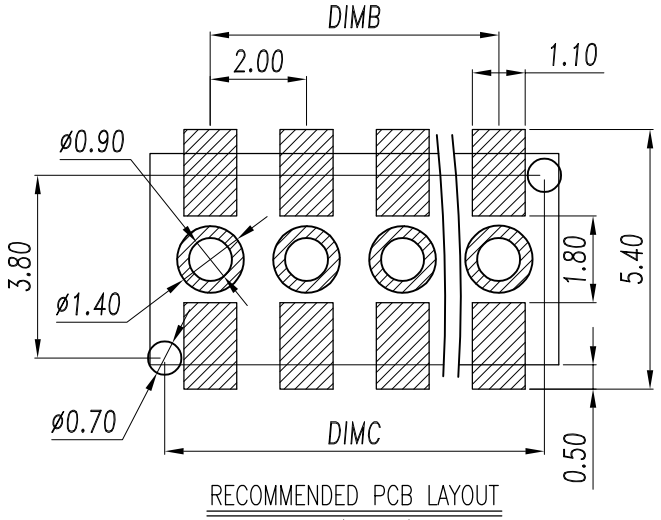

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

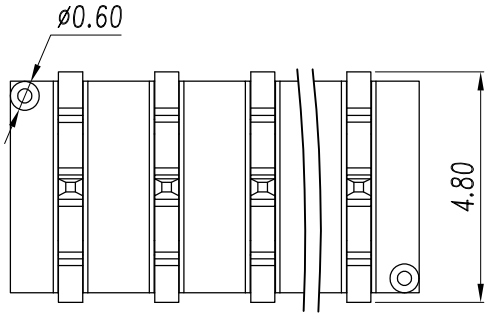

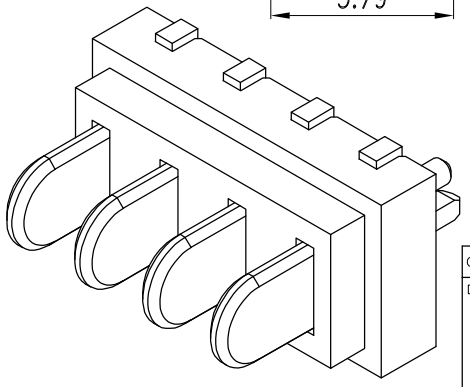

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
X.	±0.25	FINISHED		SEE NOTES	
.X	±0.20	APPROCED	KATE DENG		
.XX	±0.15	CHECKED	KATE DENG		
.XXX	±0.10	DESIGN	FAND		
ANGLE		DRAWN	Wang Yan		
X.	±3.0°				
.X	±2.0°				
.XX	±1.0°				

JKF Connectivity 杰康富精密电子有限公司
J K F precision Electronics Co., LTD

TITLE:	Battery 2-10P PH2.0 H=2.6mm公座						
PART NO.	JK-BS26XXAGB027R						
DRAWING NO.							
SCALE	1:1	SIZE	A4	SHEET	1 OF 1	REV.	A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A4
Rev.F2013/09/10