




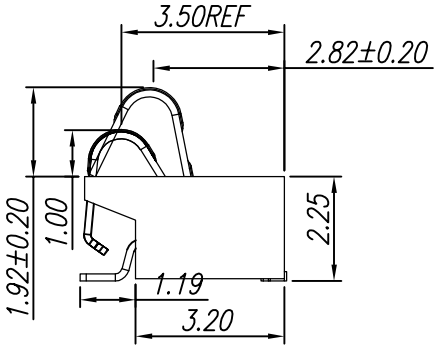





-NOTES-


1.Electrical:
- Contact resistance:50m ohms max.
- Dielectric withstanding voltage:250V RMS.
- Insulation resistance:1000M ohms min.


2.Mechanical:
- MATE AND UNMATE FORCE:
- MATE FORCE:2.5kg MAX
- UNMATE FORCE:0.5kg MIN
- Durability:3000cycles MIN.

3.Environment:
- Operating Temperature:-55°to+105°.

4.FINISH:
- TERMINAL: GOLD Plated ALL Over NICKEL.

5.MATERIAL:
- 5.1.Housing:HI-TEMP Plastic,UL94V-0,black;
- 5.2.Terminal:Coppy alloy,T=0.15mm
- 5.3 Stator:Brass T=0.20mm

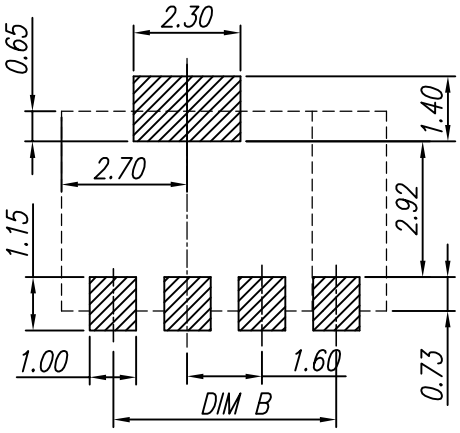

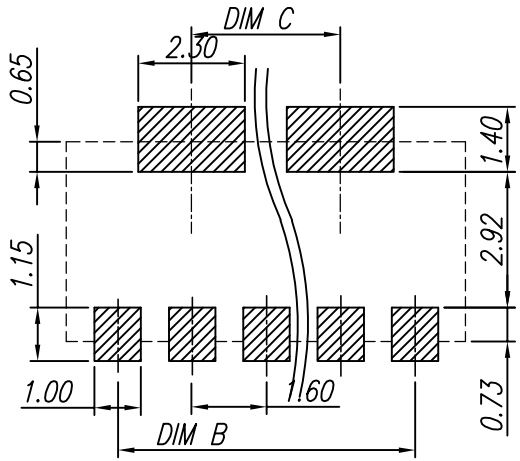

RECOMMENDED PCB LAYOUT

TOL:(±0.05)

JK-BA2210AGB004R	16.00	14.40	11.20
JK-BA2209AGB004R	14.40	12.80	9.60
JK-BA2208AGB004R	12.80	11.20	8.00
JK-BA2207AGB004R	11.20	9.60	6.40
JK-BA2206AGB004R	9.60	8.00	4.80
JK-BA2205AGB004R	8.00	6.40	3.20
JK-BA2204AGB004R	6.40	4.80	0
JK-BA2203AGB004R	4.80	3.20	0
BE FIILED	DIMA	DIMB	DIMC

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
X.	±0.25	FINISHED		SEE NOTES	
.X	±0.20	APPROCED	KATE DENG		
.XX	±0.15	CHECKED	KATE DENG		
.XXX	±0.10	DESIGN	FAND		
ANGLE		DRAWN	Wang Yan		
X.	±3.0°				
.X	±2.0°				
.XX	±1.0°				

JKF Connectivity 杰康富精密电子有限公司 JKF precision Electronics Co., LTD

TITLE:	1.60PH 2.2H 无柱3-10P 增子弹高1.90H
PART NO.	JK-BS22××AGB004R
DRAWING NO.	C119-20200525-02
SCALE 1:1	SIZE A3 SHEET 1 OF 1 REV. A

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED

Frame_A3
Rev.F2013/09/10