
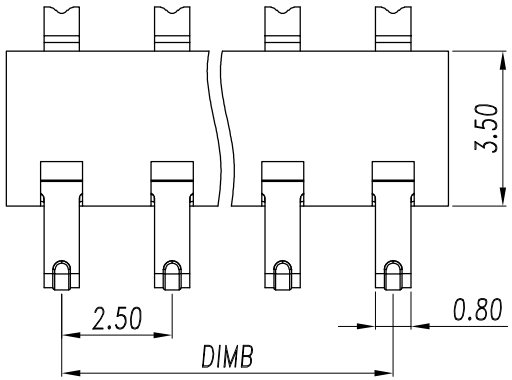


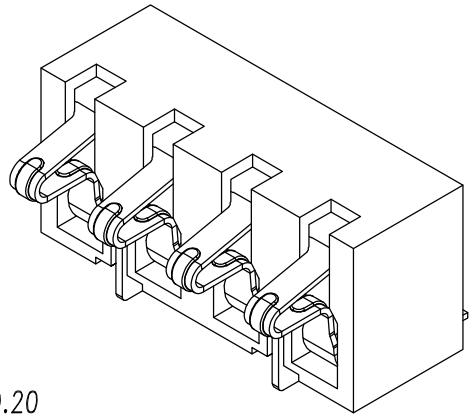

-NOTES-


1.Electrical:
Contact resistance:50m ohms max.
Dielectric withstanding voltage:250V RMS.
Insulation resistance:1000M ohms min.


2.Mechanical:
MATE AND UNMATE FORCE:
MATE FORCE:2.5kg MAX
UNMATE FORCE:0.3kg MIN
Durability:1500cycles MIN.


3.Environment:
Operating Temperature:-35°to+85°.


4.FINISH:
TERMINAL: GOLD Plated ALL Over NICKEL.

5.COLOR:
HOUSING:BLACK.

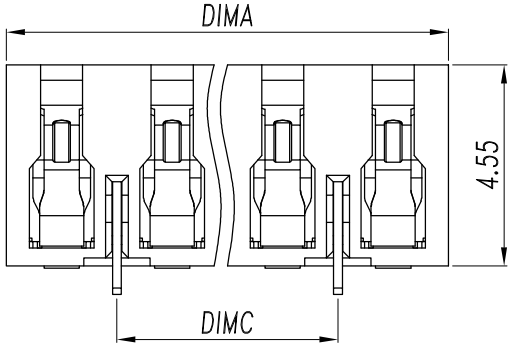


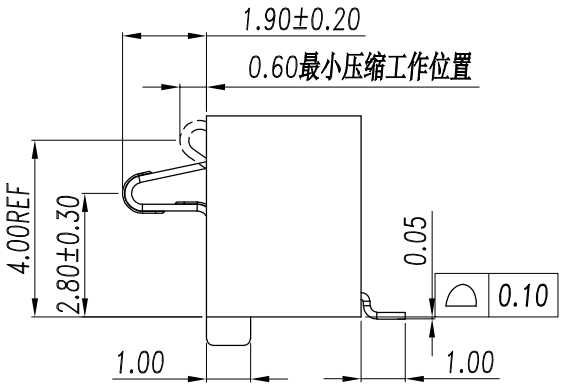

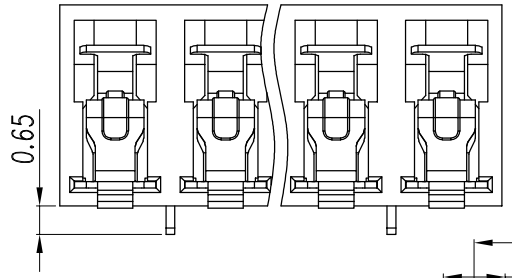

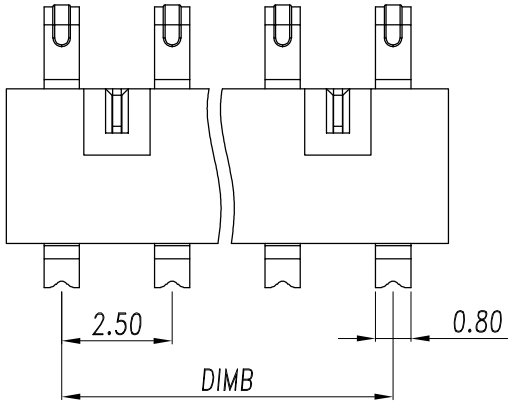

JK-BS4508AGB039R	20.00	17.50	15.00
JK-BS4507AGB039R	17.50	15.00	12.50
JK-BS4506AGB039R	15.00	12.50	10.00
JK-BS4505AGB039R	12.50	10.00	7.50
JK-BS4504AGB039R	10.00	7.50	5.00
JK-BS4503AGB039R	7.50	5.00	2.50
JK-BS4502AGB039R	5.00	2.50	0
PART NO.	DIMA	DIMB	DIMC

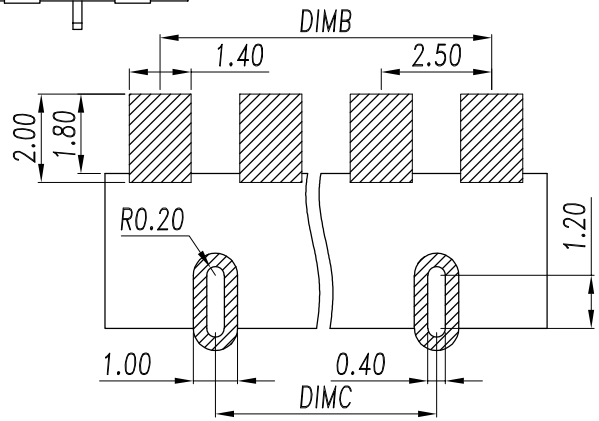

RECOMMENDED PCB LAYOUT,TOL:(±0.05)

REV.	ECN NO.	DESCRIPTION	DRAW/DATE	CHECKED	APPROVED	

GENERAL TOLERANCES		UNIT	mm		
DISTANCE	X.	MATERIAL		SEE NOTES	
	X. ±0.25	FINISHED		SEE NOTES	
	.X ±0.20	APPROCED		KATE DENG	
	.XX ±0.15	CHECKED		KATE DENG	
	.XXX ±0.10	DESIGN		FAND	
ANGLE	X. ±3.0°	DRAWN		Wang Yan	
	.X ±2.0°				
	.XX ±1.0°				

JKF Connectivity 杰康富精密电子有限公司
J K F precision Electronics Co.LTD

TITLE:	电池座 2.50PH 4.5H DIP 0.60						
PART NO.	JK-BS45XXAGB039R						
DRAWING NO.							
SCALE	1:1	SIZE	A4	SHEET	1 OF 1	REV.	A

Frame_A4
Rev.A2013/09/10