

RoHS Compliant

REV	ECN No.	DATE	REMARK
1	原始图档	2022.04.09	

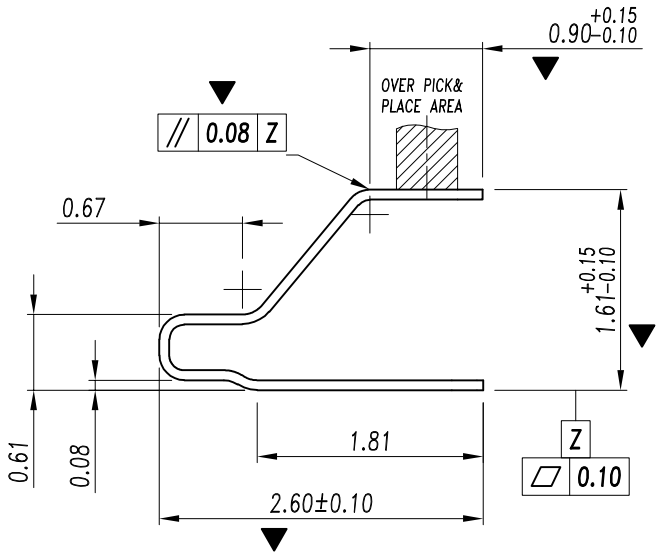



NOTES:

(1)MATERIAL:

1-1:STAINLESS STEEL THICKNE=0.08mm

(2):FINISH:

2-1:5u" MIN Au PLATING ON CONTACT AREA,
1u" MIN Au PLATING ON SOLDER AREA,
50-160u" NICKEL UNDER RLATING OVER ALL.

2-2:DIMENSIONS OF PCB PAD STENCIL ARE FOR REFERENCE ONLY, CUSTOMER CAN MODIFY IT BY THEIR OWN.

(3)PRODUCT SPECIFICATIONS:

3-1:RATED CURRENT: 1.0A/MAX
3-2:VOLTAGE RATING: 1.50V/AC/DC/MAX
3-3:CONTACT RESISTANCE: 80mΩ/MAX
3-4:WELDING THRUST: ≥3KG
3-5:OPERATING TEMPERATURE: -40°C~+85°C
3-6:DURABILITY: 1500 CYCLES.


(4):SALT SPRAY: 24 HOURS


(5):PACKING SPECIFICATION:REEL&TAPE


(6):DIMENSIONS MARKED ⬭ ,CPK>1.33

(7):ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC.

(8):COMPLIANT TO RoHS & LEAD FREE

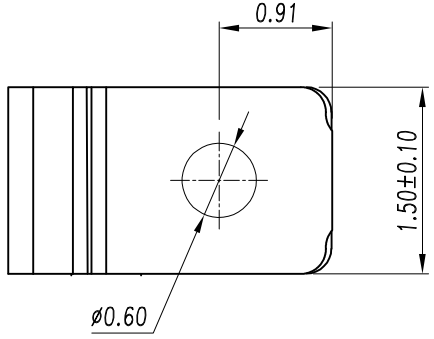

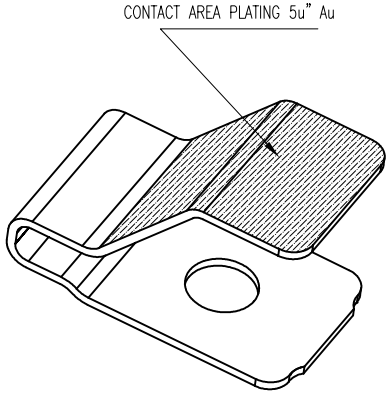

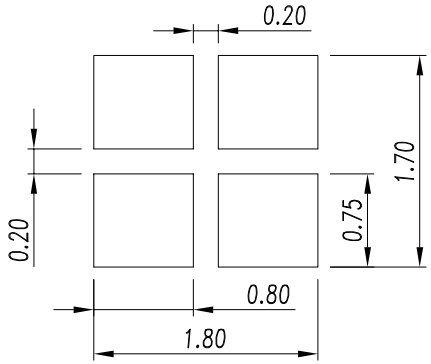

RECOMMENDED PCB LAYOUT
TOLERANCE±0.05(焊盘推荐图)

MATERIAL NO.:	JK-0R1600AG0083R
	REVIEW TABLE FOR DETAILS
QUALITY SYMBOL	▶ = 12, C = 0
GENERAL TOLERANCES (UNLESS SPECIFIED)	X. ±0.25 / X. ±4.0° ; .X ±0.20 / .X ±3.0° ; .XX ±0.15 / .XX ±2.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J K F Technology Co.,Ltd. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE	H1.60 Antenna spring terminal,SMT T=0.08mm FOR CUSTOMER
ECN DESCRIPTION	RELEASE TO TOOLING
DRAWN BY / DATE	KATE DENG
CHECKED BY / DATE	FAND / -----
APPROVED BY / DATE	Wang Yan / ------
JKF connectivity	J K F Technology Co.,Ltd
DOCUMENT NO.	
SHEET NO.	1 OF 1
DIMENSION STYLE	MM ONLY
DESIGN UNITS	METRIC
SCALE	10:1
	THIRD ANGLE PROJECTION

frame size: A4
Rev.A 2022.04.09